


Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	I	

# Port of Milford Haven

## Entry And Departure Guidelines For Vessels

Document Amendments			
DATE	SECTION	PAGE	AMENDMENT
Ninth Edition – April 2021	Port of Milford Haven	4	MHPA Acts and Orders 1983-2002
Ninth Edition – April 2021	Controlling Depth	6	Control Depths In Main Channel
Ninth Edition – April 2021	Swell Effects	8	Moorings
Ninth Edition – April 2021	Port Control (VTS)	12	MHPA Acts and Orders 1983-2002
Ninth Edition – April 2021	Pilotage	19 & 20	Towage Guidelines, Pilot Boarding arrangements & open loop scrubbers
Ninth Edition – April 2021	Tug Usage For Movement Of LNGC	21	Escort Tug
Ninth Edition – April 2021	Overcarriage	23	COVID restrictions
Ninth Edition – April 2021	Safe Speed When Transiting The Haven	25	New addition
Ninth Edition – April 2021	Port Guidelines – Jetty Information	27-39	Amended control depths
Ninth Edition – April 2021	Normal Mooring Boats Deployment	44	Composition of Mooring boats and gangs
Ninth Edition – April 2021	Safety Signals When Running Lines	45	New addition
Amendment 1 – Oct 2021	Port of Milford Haven Schedule 2 Checklist October 2021	49	Updated Schedule 2



Safety



Excellence



Collaboration




Sustainability

THE UK'S LEADING ENERGY PORT

[mhp.co.uk](http://mhp.co.uk)



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	3	

## Contents

1.	Introduction .....	6
2.	Function .....	6
3.	Pilot Vessels .....	6
4.	Tugs .....	6
5.	Approach & Entry.....	7
6.	High Intensity Leading Lights and Racons .....	7
7.	Castle Martin Firing Range .....	7
8.	Directions for Deep Draught Vessels .....	7
9.	Vessels Constrained by their Draught.....	8
10.	Controlling Depth.....	8
11.	Under Keel Clearance.....	8
12.	Density .....	8
13.	Deep Draught Vessels - Inward Procedure .....	8
14.	Berth Approaches .....	8
15.	Bunkering.....	9
16.	Anchorage .....	9
17.	Tidal Streams.....	10
18.	Swell Effects .....	10
19.	Navigation West Channel.....	10
20.	East Channel.....	11
21.	Main Channel .....	11
22.	South Hook to Puma Energy Jetty.....	11
23.	Puma Energy to Valero Pembrokeshire Oil Terminal (VPOT) Jetty .....	12
24.	Above Valero Pembrokeshire Oil Terminal (VPOT) Jetty .....	12
25.	Pembroke Port.....	12
26.	Milford Docks And Approaches.....	13
27.	SOUTH HOOK LNG TERMINAL.....	13
28.	PUMA ENERGY TERMINAL .....	13
29.	Valero Terminal.....	13
30.	Dragon LNG Terminal .....	14
31.	Valero Pembrokeshire Oil Terminal (VPOT) .....	14



Safety



Excellence




Collaboration




Sustainability

THE UK'S LEADING ENERGY PORT


[mhpa.co.uk](http://mhpa.co.uk)

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	4	

32.	Milford Haven VTS .....	15
33.	Stations .....	16
34.	Procedure – Reporting And Communications.....	17
35.	Dangerous Goods In Harbour Areas Regulations 2016.....	17
36.	Vessels Inward Bound .....	17
37.	Inbound Reporting Points .....	17
38.	Vessels Underway Within The Haven .....	18
39.	Vessels Anchoring Within The Haven.....	18
40.	Vessels Outward Bound .....	18
41.	Outbound Reporting Points .....	18
42.	Incident Reports.....	18
43.	Information Broadcasts.....	18
44.	Harbour Surveillance Radar .....	19
45.	Passage Plans .....	19
46.	Accident Procedures .....	19
47.	Milford Docks VHF Working Channel.....	19
48.	Berthing Operations, Working Channels.....	20
49.	Alongside Safety.....	20
50.	Small Craft Mooring Areas .....	20
51.	PILOTAGE .....	22
52.	TUG AND TOW .....	22
53.	BOARDING POSITION FOR LARGE VESSELS.....	22
54.	Combination Ladders .....	23
55.	Pilot Ladder Defects .....	23
56.	Vessels Arriving Off The Port .....	23
57.	Fuel Changeover On Ships .....	23
58.	Reduced Visibility .....	23
59.	Pilot Bookings.....	24
60.	Arrivals .....	24
61.	Departures .....	24
62.	Pilotage Exemption Certificates .....	24
63.	Tug Usage For Berthing Of Crude Carriers .....	24
64.	Tug Usage For Movement Of Lngc.....	25

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	5	

65.	Use Of Chain Stoppers On Tow Ropes .....	25
66.	Milford Haven Vlcc Definition .....	25
67.	LNGC Definition.....	25
68.	LNGC / Specified Vessel Restrictions Per Notice To Mariners .....	25
69.	Entry Restriction For Large Vessels .....	26
70.	Under Keel Clearance.....	26
71.	Swinging Room.....	26
72.	Procedure.....	26
73.	Overcarriage.....	27
74.	LNG Movement Constraints.....	28
75.	Safe Speed When Transiting The Haven .....	29
76.	PORT GUIDELINES – JETTY INFORMATION.....	33
77.	PORT GUIDELINES – JETTY MOORING ARRANGEMENT .....	51

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	6	

## 1. Introduction

The Port of Milford Haven (51° 42' N, 05° 02' W) covers a well sheltered extensive area of the Haven from its entrance, which lies between St. Ann's Head (51° 41' N, 05° 10' W) and Sheep Island, two miles ESE to the upper reaches of the River Cleddau, as defined by Milford Haven Port Authority Acts and Orders 1983 to 2002.

Milford Haven is a river valley drowned by rising sea waters at the end of the Ice Age and now forms an arm of the sea enclosing over 70 miles of coastline within an entrance less than 1½ miles wide. The bed of the river forms a natural deep-water channel.

The dredged channel as far as Valero jetty no.1 berth allows vessels of up to 15.6 metres draft to berth on every tide.

The tidal range varies from 6.3 metres at Mean Springs to 2.7 metres at Mean Neaps. The maximum tidal velocity does not exceed 2.12 knots below Wear Point.

Compared with almost all other ports in the UK, Milford Haven is relatively fog free. Fog, with a visibility of less than 300 metres, occurs on average for short periods on only 15 days a year. While winds of gale force occur rather more frequently than in many ports in the UK, their average duration is only 6 hours.

## 2. Function

The Port of Milford Haven, which includes Pembroke Port, is principally a major energy port equipped with oil terminals for deep draught ships serving one refinery, two LNG terminals and two tank storage terminals.

A general cargo terminal operates at Pembroke Port together with a Ro-Ro ferry terminal whose service links the area with Rosslare in the Republic of Ireland.

Milford Docks has a dry dock and repair facilities for vessels up to 100 metres long and 19 metres beam. It also serves as a base for deep sea trawlers. A part of the dock is given over to a Marina. Vessels carrying explosives have been worked in the port, but only Pembroke Port Quay I holds an explosives license.

## 3. Pilot Vessels

The body responsible for the area is the Milford Haven Port Authority, Gorsewood Drive, Milford Haven, Pembrokeshire, SA73 3EP. Telephone No.: 01646 696100.

The Port Authority has its offices at Hubberston Point (51° 42'.44 N. 05° 03'.09 W) where the VTS is located: -

Telephone No.:+44(0) 1646 696136/7


Email: vts@mhpa.co.uk.

## 4. Tugs



THE UK'S LEADING ENERGY PORT

[mhpa.co.uk](http://mhpa.co.uk)

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	7	

The tugs are operated by Svitzer Marine Ltd, Svitzer House, Pembroke Port, Gate 4, Fort Road, Pembroke Dock, SA72 6TB.

Tel: (0)1642 258390  
Mob: (0)7919 570892

There are nine tractor (twin asd) tugs with bollard pull between 117 tonnes and 80 tonnes permanently on station in the Haven. All the tugs are equipped for firefighting. During emergencies, the tugs come under the direct control of the Harbourmaster, within port limits. Tugs moor at the following locations when not occupied: Carr Jetty and PDFT pontoon, Wear Spit moorings, AngleBay moorings and South Hook moorings. Svitzer Haven, Caldey and Ramsey are refinery tugs. Svitzer Waterston is the Dragon LNG guard tug. LNG tugs are available for third party use but this is not available at short notice.

## 5. Approach & Entry

The Harbour is entered through the West Channel, the main deep-water approach channel, or the East Channel. At their convergence, a single dredged channel leads towards the various berthing areas. The West and combined channels are marked by leading lights, which are fitted with high intensity lights for use in daylight in reduced visibility. These day lights will be exhibited on request to the Milford Haven VTS at any time. Lighted buoys and beacons warn the mariner of dangers up as far as Neyland Spit (51° 42'.1 N, 04° 56'.8 W).

## 6. High Intensity Leading Lights and Racons

The following leading lights are fitted with high intensity lights for use in daylight in reduced visibility: West Blockhouse Point, Watwick Point, Great Castle Head, Little Castle Head, Popton Point, Bullwell and Newton Noyes. In addition, Great Castle Head is fitted with a high intensity PEL light.

These “daylights” will be exhibited, on request to the Milford Haven VTS at any time.

Racons are fitted to West Blockhouse (Q) and Watwick (Y) leading lights and transmit continuously.

## 7. Castle Martin Firing Range


The gunnery ranges at Castlemartin are active for up to 44 weeks in the year, starting in late February and ending in mid-December.

The danger area extends out to sea from the coast between Little Furznip, (51° 39'.2 N 05° 03'.5 W) and St. Govan’s Head (51° 35'.8 N, 04° 55'.5 W).

The actual danger area on any particular day depends on the type of weapons and ammunitions being fired. The area can extend out to 12 nautical miles off the coast, or as little as 3 nautical miles.

## 8. Directions for Deep Draught Vessels



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	8	

Vessels with a draught of 14.5 meters and over enter the harbour through the West Channel (51° 40'.0 N, 05° 10'.4 W) only and normally with a west going tidal stream. Under these conditions, vessels will be heading about 040° to keep the outer leading lights in line bearing 022½° and will thus be on the right heading for the West Channel leading lights on passing Middle Channel Rocks light. (Fl. (3) G. 7 secs.).

## 9. Vessels Constrained by their Draught

- 9.1. Within the port limits a vessel of draught 12 metres or more should exhibit the shape and lights, and in restricted visibility should make the appropriate sound signals, for a vessel constrained by her draught. Such a vessel is particularly restricted when in the vicinity of Angle light buoy.

## 10. Controlling Depth

- 10.1. The controlling depth for all states of the tide as far as the Valero deep water berths is 15.6 meters and for the Valero Pembrokeshire Oil Terminal (VPOT) deep water berth is 11.8 meters. The control depth from VPOT to the Ferry Terminal at Pembroke Port is 7.1 meters when proceeding north and east of the Dockyard Bank. The control depth in the Milford Shelf swinging ground is 9.3 metres for vessels over 275m LOA. For vessels under 275m the control depth is 11.0 metres. For the latest information on the controlling depths, the Port Authority should be contacted.

## 11. Under Keel Clearance

- 11.1. The minimum under keel clearance allowed is 10% of the vessel's deepest draught reading but this may be increased in periods of heavy swell. However, it should be noted that heavy swell may be experienced until inside St. Ann's Head and in adverse conditions as far as Angle light buoy. As a general rule, the under-keel clearance for deep draught vessels on the oil and gas terminals is 1 metre but should not be less than 5% of the vessel's draft.

## 12. Density

The water density is 1.026 g/cm<sup>3</sup> within the open confines of the harbour.


## 13. Deep Draught Vessels - Inward Procedure

- 13.1. Vessels bound for the oil terminals make tugs fast between the Angle buoy and South Hook buoy. VLCCs and LNGCs which require 4 or 5 tugs have little, but adequate time to make them fast. It is therefore extremely important for a deep draught tanker to have everything ready and the crew on stations prepared to make tugs fast by the time the Angle buoy is reached and that after the turn is made the speed over the ground is reduced quickly so that by the time the South Hook buoy is reached, all tugs are fast. LNG vessels make 4 tugs fast. One is an escort which will make fast outside and the remaining three meet the vessel, from Mill Bay (one may be at Angle buoy at the pilot's discretion for bow-to-bow work), in the West Channel to begin making fast.

## 14. Berth Approaches





Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	9	

14.1. Many of the incidents during berthing operations have arisen because of a combination of an angled approach to the berth, excessive headway and berth approach speed with a sheer resulting from astern engine movements.

14.2. Vessels, particularly of 70,000 DWT and over, are strongly advised against approaching terminal berths at an angle. The safest manoeuvre being to bring the ship to rest, stopped over the ground, parallel to and about 40 - 60 metres off the berth before breasting in.

## 15. Bunkering

15.1. Bunkering is only permitted within the designated areas defined in these Guidelines. Bunker check lists are to be completed and Milford Haven VTS advised prior to commencing and on completion of bunker operations.

## 16. Anchorages

16.1. Vessels wishing to anchor inside the port limits must obtain prior clearance from Milford Haven VTS. Vessels at anchor within the Haven must seek the permission of the Harbourmaster prior to bunkering or immobilizing engines.

16.2. Loaded small tankers arriving at the port are not normally permitted to anchor within the Haven. Partially loaded small tankers which have commenced loading at oil terminals, may be permitted to anchor within the Haven only with the Harbourmaster's permission.

16.3. Vessels which have to wait outside the Haven should keep well offshore, maintaining a listening watch on VHF channels 16 and 12 and allowing sufficient time to reach the entrance at the proper time for boarding the Pilot to enter port.

16.4. Ships of up to 12 metres draft for which there is no berth available can find an anchorage within the Haven, but because of problems experienced in the past the Milford Haven VTS will encourage vessels of more than 7 metres draught to remain outside the Haven.

16.5. Dale Roads is the only anchorage for ships over 7 metres and under 12 metres draught, no more than two commercial vessels will be allowed to anchor in Dale Roads at any given time.

16.6. Dale Roads is exposed to wind and swell and has an uneven, rocky bottom which does not always offer a good holding ground. Many ships have dragged anchor here and several have lost an anchor, and so Bridge to be permanently manned with a suitably qualified watchkeeper, with a listening watch on VHF channels 16 and 12. and vessels engines on immediate notice. If vessel is planned to berth, the notice given by VTS will be 1 to 1.5 hrs, however this is not to be confused with onboard engine notice.

16.7. Unless otherwise agreed prior with VTS, the maximum planned stay in Dale Anchorage is to be 18 hours maximum, with no gale warnings in force/forecast for Met Office Sea areas, Irish Sea or Lundy, for expected duration of stay in the anchorage. Maximum wind speed forecast not to exceed 25 knots. If conditions deteriorate (wind speed taken at Mid Channel Rock Beacon), anchorage is to be vacated, this should be done in good time to



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	10	

embark and disembark a Pilot if the Master is not in possession of a Pilotage Exemption Certificate. Ships without a Pilotage Exemption Certificate will not normally be permitted to anchor within the Haven for this reason.

16.8. Stack Anchorage can be used by medium sized vessels up to 7 metres draught. It is a little more sheltered and has better holding ground.

16.9. Small ship anchorages are at Dale Roads and Dale Shelf.

16.10. Cruise ships, up to 220m LOA, may anchor on Milford Shelf to tender passengers to/from shore. The designated cruise ship anchorage position is 51° 42.06' N 005° 02' W and is marked on BA Chart 3274, 3275. A Milford Haven pilot will be aboard at all times and a harbour tug made fast. Wind limits for cruise ships are: 20 knots with a Svitzer tug; 15 knots with a smaller tug.

## 17. Tidal Streams

17.1. Across the entrance to Milford Haven the streams run approximately at right angles to the line of approach; well within the entrance they run nearly parallel to the channel.

**The tidal streams run approximately as follows: -**

Position	Interval from HW Milford Haven	Direction
One mile outside the entrance	+ 0455	East
	- 0125	West
<b>The maximum spring rate in each direction is 2¼ knots</b>		
Inside the entrance	- 0555	In going
	+ 0030	Out going


**The maximum spring in going rate is 1½ knots and the outgoing rate is 1¾ knots. Tidal streams within the Haven run in the direction of the deep-water channel as far as Wear Point (51° 42' N, 04° 59' W). In the reach above Wear Point the in going stream is deflected to the north side of the channel by Carr Spit (51° 42' N, 04° 57'.8 W).**

## 18. Swell Effects

18.1. During or after southwest or westerly gales, there may be a heavy swell running straight into the West Channel, making steering, and even keeping a fixed course, difficult. Vessels may yaw through up to 20°. The swell does not dissipate until the Mill Bay area and its effect is not lost until in the lee of Thorn Island. Consideration should be given on more exposed berths in the Western Haven that might still feel the effect of the swell and vessels moored on these berths may need additional lines accordingly.

## 19. Navigation West Channel



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	11	

- 19.1. The West Channel with a minimum depth of 15.6 metres is available to all vessels of suitable size and draft.
- 19.2. All large vessels approach the West Channel using either the West Blockhouse/Watwick (022°) leads or the Great Castle/Little Castle Head (040°) leads.
- 19.3. In addition to marking the lines of approach, the leads can be used to assess rate of drift across track. Care should be taken to remain in the white sector of the West Blockhouse Point light (220° to 250°) during the turn at Angle buoy.
- 19.4. A high intensity PEL light is also available on request covering the entrance to the West Channel –see Admiralty Sailing Directions.

## 20. East Channel


- 20.1. The East Channel with a minimum depth of 9.8 metres is available to all vessels of suitable size and draft; however, the 9.8 metre patch opposite Thorn Rock restricts the turning of large vessels into the main channel.
- 20.2. Tidal streams to seaward of the East Channel are similar to those off the West Channel, although the effect of the north-west stream is lost earlier than the south.

## 21. Main Channel

- 21.1. The control depth from Chapel buoy to Valero is 15.6 metres.
- 21.2. Blue LED leading lights at Bullwell/Popton, available on demand from Milford Haven VTS, are for use for swinging LNG carriers in the South Hook LNG swinging area.

## 22. South Hook to Puma Energy Jetty

- 22.1. A bar extends into the channel at South Hook. With deep draught vessels, it may be necessary to reduce speed beforehand to minimise the effects of squat.
- 22.2. The flood tide can set strongly onto the Qatar buoy and the ebb can set strongly onto South Hook buoy. At night, these buoys, and outbound traffic can be difficult to pick out from amongst the backdrop of refinery/terminal lights.
- 22.3. The principal aid for the reach from Qatar buoy to East Angle buoy is the Popton/Bullwell leads. Once past South Hook LNG terminal No. 1, the south side of the deep-water channel is marked by a light beacon, 20 metres south of the front leading light, in line with the Bullwell rear light.
- 22.4. A “Guard” tug will be stationed off South Hook LNG terminal to shadow vessels, over 50 metres LOA, passing and to be able to offer assistance if required in an emergency.
- 22.5. Milford Haven VTS will instruct vessels whether to use the North or South Channel when passing South Hook LNG. The South Channel has a control depth of 9.4 metres.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	12	

22.6. From East Angle buoy, the Newton Noyes south (080°) leads serve as far as Valero No.1 berth. There is shallow water near South Hook LNG terminal No. 3 berth; therefore, care must be taken at the East Angle turn in a deep draught vessel.

22.7. The leading lights at Popton/Bullwell and Newton Noyes are fitted with high intensity day lights which operate on request to Milford Haven VTS.

22.8. This whole section tends to be a navigation “pinch point” with inward and outward vessels constantly changing their courses and aspects. This is compounded by strong tidal sets and winds.

22.9. As the channel is relatively narrow throughout this section, vessels with high freeboards will “crab” along the channel in high crosswinds, taking up most of the available width. For this reason, such vessels should not pass between South Hook buoy and the eastern end of Puma Energy terminal in high crosswind conditions.

### 23. Puma Energy to Valero Pembrokeshire Oil Terminal (VPOT) Jetty

23.1. The channel is narrow between Newton Noyes Jetty and No. 5a buoy, therefore deep draught vessels must be kept strictly on track. The Wear Spit/Southwest Martello Tower leads mark the port side of the channel, and the Llanreath/Pennar leads mark the starboard side, as far as VPOT Jetty.

### 24. Above Valero Pembrokeshire Oil Terminal (VPOT) Jetty


24.1. From VPOT Jetty to Wear Spit, the channel narrows considerably. Only one large vessel (a vessel over 50 meters LOA), unless otherwise approved by the Harbourmaster, may move at a time above Newton Noyes.

24.2. In the reach above Wear Spit the channel width is reduced to 100 - 200 metres. This can give problems at Carr Spit turn; too wide a turn will close the north bank and too tight a turn will result in the ship coming close to the northern side of Carr Spit.

24.3. The tidal streams above Wear Spit introduce further hazards. Because of the narrowing of the channel, the stream runs faster than those experienced downstream. The flood stream is deflected to the north side of the channel by Carr Spit.

24.4. In Pembroke Reach, the flood stream runs principally in the channel, north of Dockyard Bank. It is weak and irregular in the channel south of this bank, in which it attains a spring rate of ½ knot. The ebb stream runs strongly in the channel south of Dockyard Bank attaining a spring rate of 2 knots and sets strongly onto Dockyard Bank No. 4 buoy and the Offshore jetty. In the channel to the north of the bank, the ebb stream is weak on the south side of the channel, but on the north side, an eddy runs strongly during the ebb.

### 25. Pembroke Port

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	13	

25.1. The western approach to Carr Jetty is made after passing Carr No. 2 buoy, using the (153°) leads. The eastern approach is through Pembroke Reach, thence east and south of Dockyard Bank.

25.2. Within Pembroke Port, vessels up to 100 metres length may berth at any state of tide. Larger vessels may only berth at slack water, subject to Pilots discretion. The approaches and berths are liable to rapid silting.

## 26. Milford Docks And Approaches

26.1. The narrow approach channel to the lock entrance is marked by two buoys at the inner end, 1 cable from the lock. The channel is also marked by blue LED strip leads. The alignment of these lights (348°) leads from the deep-water channel to the approaches to the lock. This channel is buoyed. There are shoal patches which lie less than ½ cable on either side of this line. The tidal stream runs across the entrance to the lock.

26.2. Maximum width between the lock gates is 20.5 metres. Speed should be minimised on entry and exit as the lock gates and the caisson gates are still affected by interaction, even when tied back. Least depth over the sill is 3.2 metres. The caisson, when open, partially obstructs the inner entrance.

26.3. The maximum length to swing in the dock is 113 metres. This would be reduced as appropriate with another vessel alongside.

## 27. SOUTH HOOK LNG TERMINAL

27.1. The swinging area to the west of the berths is marked by buoys and the blue LED leading marks.

## 28. PUMA ENERGY TERMINAL

### 28.1. Inside Berth

28.1.1. The inside berth at Puma Energy Jetty (No. 3) has a northern limit marked by two fixed red light beacons on the jetty, in line, bearing 254°. This is 190 metres from the face of the jetty.

## 29. Valero Terminal

### 29.1. Inside Berths

29.1.1. The inside berths at Valero Jetty (Nos. 4 and 5) have a southern limit marked by two pairs of light beacons on the jetty, in line, bearing 268°. The fixed red lights are 125 metres from the face of the jetty. The fixed yellow lights are 140 metres from the face of the jetty.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	14	

29.1.2. The maximum ship length for the inside berths at Valero is 100 metres. Ebb berthing is permitted unless the vessel is greater than 90 metres LOA with no bow thruster, but particular care is required when berthing on inside berths on spring ebb with strong southerly and easterly winds.

### 30. Dragon LNG Terminal

30.1. Leading lights situated at Dragon LNG indicate the approach to the berth.

### 31. Valero Pembrokehire Oil Terminal (VPOT)

31.1. The VPOT turning basin is marked at its southern extremity by a buoy. The Llanreath/Pennar leading lights provide a clearing line for the shallow water. Off VPOT No. 3, a bank extends southward into the channel; special care is required turning off this berth.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

[mhp.co.uk](http://mhp.co.uk)

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	15	

## Milford Haven Port Authority

### 32. Milford Haven VTS


**Description:** Shipping movements are coordinated by the Milford Haven Port Authority, Call sign “Milford Haven VTS”. It is mandatory for all vessels over 20 meters in length operating in Milford Haven and approaches.

**Jurisdiction:** The sea area, as defined by Milford Haven Port Authority Acts and Orders 1983 to 2002, bounded by:

- a. An imaginary line commencing at the western extremity of Studdock Point and drawn in a south easterly direction to the point of intersection of latitude 51° 36'.25 N with longitude 05° 03'.00 W, thence in a westerly direction to the point of intersection of latitude 51° 36'.25 N with longitude 05° 16'.00 W and thence in an northerly direction to the point of intersection of latitude 51° 40'.8 N with longitude 05° 16'.00 W and thence in an easterly direction to the south western extremity of St. Ann’s Head; and
- b. The level of high water on the shores of Milford Haven and the approaches thereto within the line aforesaid, including all bays, creeks, pools, inlets and rivers as far as the tide flows other than a creek, pool or inlet into which the tide flows only through a culvert or pipe and other than a dock which is normally tidally enclosed.

#### POLICY:

- (1) Milford Haven VTS is a Vessel Traffic Service defined by the IMO as “a service to prevent the development of dangerous maritime traffic situations and to provide for the safe and efficient movement of vessel traffic within the VTS area”.
- (2) The purpose of Milford Haven VTS is to contribute to the safety of life at sea, improve safety and efficiency of navigation and support the protection of the environment within the VTS area by mitigating the development of unsafe situations by maintaining a control of shipping movements by providing pertinent, accurate and timely advice to vessels entering or leaving the Haven.
- (3) Milford Haven VTS will consult and plan the sequence of vessel movements for both entry and exit from the Haven and advise master’s and Pilots of their place in any queue.
- (4) Policy will be to maintain the sequence of movements where practicable by instructing Masters and Pilots not to proceed until permission has been granted.
- (5) Once a movement has commenced Milford Haven VTS will support that movement through to completion.
- (6) Milford Haven VTS is to monitor the traffic image to maintain situational awareness and use this to ensure that potential conflict is assessed early and, if necessary, intervene.
- (7) Decisions made and advice given by Milford Haven VTS staff pursuant to this Policy carry the formal authority and support of the Harbourmaster and Chief Executive.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	16	

- (8) Milford Haven VTS staff will always be appropriately qualified. This will include experience in the port, V103/1 minimum, but V103/02 or senior STCW for Duty Officers.
- (9) Milford Haven VTS will record and respond to incidents, near misses and infringements.

Note:

- i. The Master of a vessel is always in command.
- ii. When on board, a Pilot/Exemption Certificate holder has the conduct of the vessel and is responsible to the Master for its safe navigation.
- iii. The Master, or Officer of the watch, has the conduct of the vessel when no Pilot is on board.

### 33. Stations

#### 1) MILFORD HAVEN VTS

**Operator:** Milford Haven Port Authority.  
**Call:** "Milford Haven VTS".  
**Location:** Hubberston Point (51° 42'.44 N, 05° 03'.09 W).  
**Telephone:** +44(0) 1646 696136/7.  
**Fax:** +44(0) 1646 696110.  
**Email:** [VTS@mhpa.co.uk](mailto:VTS@mhpa.co.uk)  
**Frequency:** Channels 09, 10, 11, 12, 14, 15 and 16 VHF.  
**Hours:** Channels 11, 12, 14 and 16 VHF continuous.

#### 2) PATROL LAUNCH

**Operator:** Milford Haven Port Authority.  
**Call:** "Milford Haven Patrol".  
**Frequency:** Channels 06, 08, 11, 12, 14 and 16 VHF.  
**Hours:** Channels 11 and 12 VHF continuous.

#### 3) TUGS, MOORING BOATS, WORK BOATS AND WASTE BARGE


**Operator:** Svitzer Marine Ltd.  
**Frequency:** Channels 06, 08, 09, 11, 12, 14, 15 and 16 VHF.  
**Hours:** Channels 12 and 16 VHF continuous.  
**Location of Shore Base:** Svitzer Marine Ltd, Svitzer House, Pembroke Port, Gate 4, Fort Road, Pembroke Dock, SA72 6TB.  
**Telephone:** +44 (0)1642 258390  
**Mobile:** +44 (0)7919 570892

#### 4) WORK BOATS

**Operator:** Williams Marine Ltd.  
**Frequency:** Channels 06, 08, 09, 11, 12, 14, 15 and 16 VHF  
**Hours:** Channel 12 when manned





Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	17	

**Location of Shore Base: The Dockyard, Pembroke Dock**  
**Telephone: +44 (0)1646684169**

### 34. Procedure – Reporting And Communications

Schedule 2 report must be sent to Milford Haven VTS before arrival and departure. See Appendix 1 for a sample Schedule 2 Report.

### 35. Dangerous Goods In Harbour Areas Regulations 2016

The report must be sent to Milford Haven VTS and berth operator at least 24 hours before arrival at Milford Haven by the following method:

- i. Through the vessel's agent.

Any vessel wishing to immobilize engines, undertake hot work, launch lifeboats or any other such activity must gain permission from Milford Haven Port Authority.


### 36. Vessels Inward Bound

- a. Vessels must send ETA at least 12 hours in advance to Milford Haven VTS, with any subsequent amendments at least 2 hours before arrival.
- b. Vessels must confirm ETA by VHF when within 20 - 30 nautical miles of St. Ann's head (51° 40'.9 N, 05° 10'.4 W).
- c. When within 1 hour of St. Ann's head, vessels must contact Milford Haven VTS on VHF channel 12 and must subsequently maintain watch on channel 12 as directed.
- d. Vessels with any damage or suspected damage must advise Milford Haven VTS and obtain permission to enter.
- e. Vessels towing must give a full description of the tow and obtain permission from Milford Haven VTS to enter. Towing vessel must submit a Tow plan and nominate a Tow master. See MHPA Towage Guidelines – <https://www.mhpa.co.uk/marine-services/>

### 37. Inbound Reporting Points

Vessels must report to the Milford Haven VTS when passing in the vicinity of the following:

	Name	Position	Remarks
A	West Approach	51° 39'.30 N 05° 18'.00 W	Arriving from west
B	South Approach	51° 36'.25 N 05° 14'.10 W	Arriving from south
C	East Approach	51° 36'.25 N 05° 08'.60 W	Arriving from east
D	St. Ann's light buoy	51° 40'.21 N 05° 10'.17 W	When using West Channel
E	Sheep light buoy	51° 40'.12 N 05° 08'.58 W	When using East Channel
F	Thorn Rock light buoy	51° 41'.70 N 05° 07'.65 W	
H	Cunjic light buoy	51° 41'.98 N 05° 02'.55 W	
K	Wear Spit	51° 41'.69 N 04° 58'.73 W	Bound for Pembroke Dock
J	Milford Docks	51° 42'.55 N 05° 02'.29 W	Entry or departure to Milf Docks

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	18	

### 38. Vessels Underway Within The Haven

Vessels underway within the Haven must maintain a continuous listening watch on VHF channel 12. Vessels intending to change to VHF channel 06, 08, 09 or 15 for berthing operations and communications with tugs should first advise Milford Haven VTS. Vessels must report to Milford Haven VTS when all fast on the berth.

### 39. Vessels Anchoring Within The Haven

Vessels brought up in an anchorage must report to Milford Haven VTS and whilst at anchor, must maintain a continuous listening watch on VHF channel 16 and 12. Vessels at anchor will not be permitted to take on bunkers or immobilise main engines without the permission of the Harbourmaster.

### 40. Vessels Outward Bound

Vessels must report to Milford Haven VTS as follows:

- a. Prior to getting underway from a berth or anchorage.
- b. On getting underway from a berth or anchorage and maintain a continuous listening watch on VHF channel 12 until clearing port limits.
- c. When the pilot has disembarked.

### 41. Outbound Reporting Points

Vessels must report to Milford Haven VTS when passing in the vicinity of the following:

	Name	Position	Remarks
K	Wear Spit	51° 41'.69 N 04° 58'.73 W	
J	Milford Docks	51° 42'.68 N 05° 02'.40 W	When departing MilfordDocks
H	Cunjic light buoy	51° 41'.98 N 05° 02'.55 W	
G	Qatar light buoy	51° 41'.78 N 05° 05'.25 W	Request clearance for eastor w channel
D	St. Ann's light buoy	51° 40'.21 N 05° 10'.17 W	When using West Channel
E	Sheep light buoy	51° 40'.12 N 05° 08'.58 W	When using East Channel


Vessels must then maintain continuous listening watch on VHF channel 16 until 1 hour after leaving port limits.

### 42. Incident Reports

Vessels must immediately report the occurrence of any fire, oil pollution or other emergency within the Haven to Milford Haven VTS on VHF channel 12 or 16 or by telephone.

### 43. Information Broadcasts

- i. Gale warnings on VHF channel 12 and 14 on receipt from The Met Office\*.
- ii. Expected shipping movements within the port will be given to vessels entering the port and prior to getting underway from a berth or anchorage, also on request at any time.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	19	

iii. Height of tide and wind speed and direction also barometric pressure on request.

\* Prior to these broadcasts, notification will be transmitted to all ships on VHF channel 16.

#### 44. Harbour Surveillance Radar

Mariners are reminded that Milford Haven Port Authority operates a VTS Traffic Organisation Service which includes harbour surveillance radar covering Milford Haven up to the Cleddau Bridge and seaward approaches for ranges up to 6 miles.

Vessels may obtain navigational advice and port operational information at any time by contacting “Milford Haven VTS”.

The above services are offered and will be rendered only on condition that neither the Authority nor any of its servants or agents shall be liable to any person whomsoever for any injury, loss or damage of any kind howsoever caused or arising, whether as a result of negligence or otherwise, as a result of non-availability of the service.

#### 45. Passage Plans

Vessels of 50 metres or more in length wishing to enter, depart or navigate within the area of jurisdiction of the Authority shall prepare a passage plan and declare such to Milford Haven VTS, prior to each movement commencing.

The format of the passage is left to the discretion of the Master/Exemption Certificate holder but attention is drawn to the International Chamber of Shipping’s Bridge Procedures Guide, Fifth Edition 2016, in particular, Sections 2.5 and 2.6.

#### 46. Accident Procedures

##### 46.1. Port of Milford Haven Emergency Plan

Implementation of the Emergency Plan will be announced by Milford Haven VTS on channels 16 and 12. All available relevant information will be given. Vessels in the Haven should maintain watch on VHF channel 12 for further instructions from Milford Haven VTS.


VHF channel 14 is the port’s designated emergency frequency. When a major emergency has been declared, vessels directly involved must maintain a listening watch on channel 14.

##### 46.2. Search And Rescue

H.M. Coastguard has a statutory duty to be responsible for initiation and coordination of search and rescue. However, there may be circumstances within Milford Haven Port limits when it will be appropriate for HMCG to appoint Milford Haven VTS or another unit as on-scene coordinator.

#### 47. Milford Docks VHF Working Channel

Permission to enter Milford Dock lock must be obtained directly from “PIERHEAD” on VHF channel 14. Vessels entering or leaving Milford Docks should remain on VHF channel 12 and only change to channel 14 when “working” with the “PIERHEAD”. Permission to enter the Haven from the Dock during “free flow” or from the lock during other times must be obtained from Milford Haven VTS on channel 12. Merchant vessels with Pilot, PEC (Pilot Exempt) Masters should use VHF channel 8 to liaise with Milford Dock Dockmaster on entry.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	20	

#### 48. Berthing Operations, Working Channels

VHF channels 15 and 9 have been allocated for berthing and unberthing operations within the main body of the Haven; for use by ships, tugs, mooring boats and jetties. The channel allocation is as follows:

	Primary	Secondary
North Shore	9	15
South Shore	15	9

#### 49. Alongside Safety

Mariners are reminded of the dangers of embarking and disembarking vessels from jetties or quays within the Haven.

In particular, attention is drawn to the need for a vessel making fast to be fully secure and engines stopped before shore personnel embark.

Mariners should exercise caution and communicate with the jetty when safe means of access has been provided for shore personnel to embark.


#### 50. Small Craft Mooring Areas

Mariners are reminded that vessels or objects moored to licensed permanent buoys within the following designated “small craft mooring areas” are NOT required to exhibit, all round, white riding lights.


Navigation outside the recognised channels should only be undertaken with local knowledge and, particularly during the hours of darkness, with alertness and caution.

Mooring areas as displayed on Admiralty Charts No’s. 3273, 3274 and 3275:

- Dale.
- Sandy Haven.
- Gelliswick, Cunjic and Milford Dock West.
- Milford Dock East.
- Castle Pill.
- Angle.
- Pembroke River.
- Hazelbeach and Neyland.
- Pembroke Dock.
- Hobbs Point.
- Barnlake.
- Barnlake Point and Burton.
- Warrior.
- Burton Point and Rudders Boatyard.
- Jenkins Point and Lawrenny.
- Rooseferry.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	21	

- Llangwm.
- Landshipping Quay.
- Upstream a line from position: latitude 51° 46'.00 N, longitude 04° 54'.20 W.  
latitude 51° 46'.00 N, longitude 04° 53'.22 W.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	22	

# MILFORD HAVEN PORT AUTHORITY

## 51. PILOTAGE

- a. All waters over which the Milford Haven Port Authority have jurisdiction (the seaward limit of which is an imaginary line commencing at the western extremity of Studdock Point and drawn in a south easterly direction to the point of intersection latitude 51° 36'.25 N with longitude 05° 03'.00 W, thence in a westerly direction to the point of intersection of latitude 51° 36'.35 N with longitude 05° 16'.00 W and thence in an easterly direction to the south western extremity of St. Ann's Head).
- b. The docks and works belonging to the Milford Docks Company and the waters over which they have jurisdiction.

**Call Sign:** Milford Haven Pilot.

**Telephone:** +44(0) 1646 696136/7.

**Email:** [vts@mhpa.co.uk](mailto:vts@mhpa.co.uk)

**Frequency:** Pilot Cutter: channels 06, 08, 11, 12, 14, 16 and 67 VHF.

**Hours:** Pilot Cutter: channels 12 and 16 : 24 hours.

**Procedure:** Pilotage is compulsory for all vessels over 50 metres in length within the Pilotage District except H.M. ships, vessels which are moving from one berth to another within a dock and vessels exempted by law. Request for a Pilot should be included in ETA message to Milford Haven VTS. Vessels should remain at least **5** nautical miles off St. Ann's Head until contact has been established with the Pilot Cutter.

## 52. TUG AND TOW

52.1. Compulsory pilotage if the overall length of tug plus tow plus towline is over 50 metres. (<https://www.mhpa.co.uk/marine-services/>)

52.2. When disconnected both will be subject to compulsory pilotage if they are each over 50 metres LOA.


## 53. BOARDING POSITION FOR LARGE VESSELS

**4 miles southwest of St. Ann's light house:**



THE UK'S LEADING ENERGY PORT

[mhpa.co.uk](http://mhpa.co.uk)

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	23	

51° 36'.80 N.

05° 13'.50 W.

53.1. All vessels to wait at least 5 miles off until instructed to proceed closer by either Milford Haven VTS or Pilot directly.

#### 54. Combination Ladders

54.1. Vessels with more than 9 metres freeboard require a combination ladder rigged. No forward-facing accommodation ladders will be accepted and all rungs of pilot ladder must lie against ship's hull. Pilots have been instructed not to board vessels which do not meet these requirements. Please see Pilot Boarding Arrangements for further details: (<https://www.mhpa.co.uk/marine-services/>)

#### 55. Pilot Ladder Defects

55.1. Pilots may refuse to board if pilot ladders are not compliant with IMO A.1045(27) Pilot Transfer Arrangements. All deficiencies will be brought to the attention of the Master.

55.2. Owing to the large size of Pilot Cutters, the successful boarding of a Pilot in rough weather is significantly reduced by having to use combination ladders. It is therefore advisable to reduce the freeboard to below 9 metres in vessels where this is possible, to avoid delays.

55.3. If combination ladders are used, the accommodation ladder should be rigged as high as possible, preferably the end platform should be at least 7 metres above the water level. Under no circumstances should tripping lines be used on the rope ladder.

#### 56. Vessels Arriving Off The Port


56.1. If a pilot booking has not been received, they are to be asked to stay at least 10 miles off from St. Ann's Head.

#### 57. Fuel Changeover On Ships

57.1. To clarify the ports stance on vessels changing over to / from low Sulphur fuels. We require ships to change over only when made fast. Ships have a two-hour grace period after having tied up or before letting go to change over and therefore there should be no reason to change fuel – with the possibility of a blackout being caused while underway. Use of Open Loop Scrubbers are not authorised.

#### 58. Reduced Visibility



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	24	

58.1. Vessels over 30,000 DWT and all LPG ships carrying LPG or not gas free must have at least 1 mile visibility prior to moving in the harbour.

58.2. Vessels less than 30,000 DWT carrying dangerous or polluting goods in bulk must have at least ½ mile visibility prior to moving in the Haven.

58.3. All reporting vessels over 20 metres LOA must have at least 0.1 mile visibility prior to moving in the harbour.

## 59. Pilot Bookings

59.1. Vessels on jetties - from the terminal operator (Oil), Agent (LNG), Agent or Master (Milford Dock and Port of Pembroke). Vessels at sea - from the terminal operator or Master or Agent with the agreement of the terminal operator. Bookings can also be made by a Pilot in conjunction with the Master/Agent to suit operating conditions. Please see Pilot Boarding Arrangements for further details (<https://www.mhpa.co.uk/marine-services/>).

## 60. Arrivals

60.1. Vessels are required to give at least 1 ½ hours' notice of arrival to the pilot station. If VTS have a confirmed booking then the pilot will be actioned for on arrival. All other inward vessels can book a pilot 2 hours before their ETA at the pilot station.

60.2. VLCCs will enter the Haven 1 ½ hours before HW to HW.

60.3. LNGC can book a pilot 12 hours prior to their ETA. Pilots to be confirmed 3 hours before arrival.

## 61. Departures

61.1. After completing cargo, vessels must give a minimum of 1 hour's notice to VTS or 1 ½ hours for vessels East of Wear Spit when confirming a pilot for sailing.

## 62. Pilotage Exemption Certificates

62.1. Masters holding Pilotage Exemption Certificates are required to inform the Milford Haven VTS of their certificate number when passing the vessel's ETA. Failure to give a valid number will mean that the vessel will be required to take a Pilot to navigate within the Haven.

## 63. Tug Usage For Berthing Of Crude Carriers

Up to 100,000 DWT  
100,000 to 150,000 DWT

Minimum of 2 tugs  
Minimum of 3 tugs



Safety



Excellence



Collaboration




Sustainability

THE UK'S LEADING ENERGY PORT

[mhpa.co.uk](https://www.mhpa.co.uk)



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	25	

Over 150,000 DWT

Minimum of 4 tugs

63.1. It must be recognised that the above are only general guidelines and may be varied at the pilot's discretion, depending on weather and known ship's limitations. Tug numbers may be reduced depending on ship's equipment, i.e. bow and stern thrusters, twin screw, high lift rudders, dp capability, etc. Tug numbers may also be reduced for un-berthing operations at Pilots' discretion.

63.2. For all movements of vessels over 25,000 DWT regardless of thrusters, at least one tug to be in attendance. All other tug requirements for all other ships will be to Pilots discretion as agreed with the Master.

#### 64. Tug Usage for Movement Of LNGC

64.1. LNGC will be provided with 4 tugs, one of which will be an active escort. The tug at the bow will always make fast through the center lead. **The Stern escort tug will make fast using 200t SWL stern lead and strong point. Where not available the Emergency Towing Lead and Strong point will be used, please ensure that any wires have been removed in advance from the lead and strong point.**

#### 65. Use Of Chain Stoppers On Tow Ropes

65.1. Mariners should be aware of the dangers involved in the use of chain stoppers when releasing tug tow ropes. Milford Haven tugs are equipped with synthetic tow ropes, so chain stoppers should not be used when letting go tugs either alongside a berth or underway.

#### 66. Milford Haven VICC Definition

66.1. Vessels of 65,000 gross tonnes and over are defined as a VLCC and are provided with two Pilots inward, one of which must be a Class I, bound from sea to berth. VLCCs outward bound are provided with two Pilots from berth until swung, proceeding out clear of the jetties and tugs dismissed.

#### 67. LNGC Definition

67.1. Vessels designed and built to carry liquefied natural gas in bulk. These vessels will be provided with two suitably Classed Pilots.

#### 68. LNGC / Specified Vessel Restrictions Per Notice To Mariners

##### 68.1. Controlled Zones

Extending 1 mile ahead and astern of the specified vessel and within the main channel. No commercial vessel of 20 metres or more may navigate within the controlled zone except astern of the specified vessel where such navigation is away from it and provided that prior permission has been sought from and granted by Milford Haven VTS.

##### 68.2. Exclusion Zones

Extending ahead to the limit of the line of sight from the bridge of the specified vessel within the



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	26	

confines of the channel, no vessel is permitted to navigate within this zone at any time. Such limit will be determined by a patrol vessel stationed ahead. The zone astern will extend to the stern of an escort tug, where provided, or 100 metres where it is not.

## 69. Entry Restriction For Large Vessels

- (1) For booking purposes, loaded VLCCs may only enter between 1 ½ hours before HW and HW Milford Haven.
- (2) Ballast VLCCs. Entry to Pilot's discretion, subject to there being sufficient under keel clearance and weather/tidal considerations.
- (3) For vessels of more than 17.0 metres draught, consideration must be given to allowing the vessel to manoeuvre into, or out of the Haven under carefully prescribed conditions which will be discussed and agreed between the Harbourmaster, Pilots and the company concerned.
- (4) LNGC may enter at any time subject to sufficient under keel clearance, weather and resource constraints.

## 70. Under Keel Clearance

70.1. A minimum of 10% is required at all times, while underway. To Pilots' discretion 20% in West and East Channels.

## 71. Swinging Room

71.1. As a very general rule pilots require 1 ½ x ships length sea room for swinging, although this may be varied by prior agreement.

## 72. Procedure

72.1. The order in which ships should enter or leave the Haven when a conflict of interests occurs will be governed by the following considerations (in no particular order of preference):

### (1) **FIRST COME, FIRST SERVED**

All things being equal, the principles of "first come", "first served" will be observed, and where a ship has been delayed on a previous tide, she will be given priority on the following tide.

### (2) **ARRIVAL AND DEPARTURE**

In view of the fact that a vessel at a safe anchorage, or suitably moored alongside, is in a safer position than an arriving vessel, priority will be given to arriving vessels. This criterion is unlikely to be invoked frequently owing to the wide disparity in draught of arriving and departing vessels.

### (3) **TUGS**

The availability of tugs must have an influence on the order in which ships are handled, it



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	27	

being generally accepted that no very large vessel should commit herself to the entrance until sufficient tugs are available to handle her.

(4) **TIDE**

The best use of tide must always be an important consideration, and this will be affected by:

- a. Maximum draught of ships involved.

The effects on other movements of vessels swinging

(5) **TERMINAL TO WHICH BOUND**

All other things being equal, the vessel bound further up the Haven will be given priority over the other, but this criterion is looked upon as the least important and will not be used to over-ride other considerations.

(6) **SPECIAL CONSIDERATIONS**

For instance:

- a. Urgently required ship.
- b. Position of rope runners, mooring parties, etc.
- c. Special representations concerning, say, tidal restrictions at other ports in the case of producttankers.

(7) **FERRY MOVEMENTS**


Ferry movements should be given priority *whenever possible*. Oil and gas companies have agreed to amend movement times, except in the case of VLCCs and other tidally restricted movements where amendments could lead to long delays.

(8) **PEMBROKE PORT**

The larger vessels stemmed for the Pembroke Port will usually be tidally restricted and there will be occasions when they clash with oil company vessels on the same tide. The decision as to who takes priority should in the first instance be decided by the two parties concerned. If this approach fails the Harbourmaster or in his absence the Duty Harbourmaster will be responsible for programming ship movements.

**73. Overcarriage**

- (1) A request for overcarriage may be received by Milford Haven VTS from any vessel in the port after these requirements have been explained to the Master by the vessel's Agent in advance as follows:

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	28	


- a. Vessels must have acceptable accommodation and conditions. Pilots will advise of any deficiencies.
  - b. Vessels will sail at the earliest convenient time and proceed with best dispatch to overcarriage port.
  - c. All recognised overcarry Ports may be considered including Breaksea, Lynas, Dublin, Belfast, Falmouth, Waterford, New Ross, Cork and Holyhead.
  - d. Pilots will be returned to Milford Haven by the quickest reasonable means, it is the Agent's responsibility to arrange for disembarkation and return of pilots when overcarry is agreed. If the pilot requires a flight returning from Irish ports, then only Cardiff and Bristol airports are acceptable destinations.
  - e. Vessels must comply with the rules as set out below.
  - f. Pilots will decide on whether or not to overcarry both before sailing and once again at the port limits, when they may disembark if conditions allow.
- (2) Vessels of over 25,000 DWT overcarry to Lynas and Falmouth with the Pilots at the request of the Master. Holyhead is an acceptable substitute for Lynas. Such vessels may also overcarry to Breaksea, Dublin, Waterford, New Ross, Cork and Belfast at the discretion of the Pilots, bearing in mind safety and the best interests of our customers.
  - (3) Vessels of less than 25,000 DWT may overcarry to Lynas, Falmouth, Breaksea, Dublin, Waterford, New Ross, Cork and Belfast at the discretion of the Pilots, bearing in mind safety and the best interests of our customers. Holyhead is an acceptable substitute for Lynas.
  - (4) Consideration may be given to overcarry a Pilot to Lynas, Falmouth, Breaksea, Dublin, Waterford, New Ross, Cork and Belfast depending upon the availability of a Pilot. Holyhead is an acceptable substitute for Lynas.
  - (5) In certain circumstances consideration may be given for Pilots to join at overcarrying ports for inbound movements (undercarry).
  - (6) The ships agent should confirm that the destination port is actually working ships and that a pilot launch will be available at that port.

## 74. LNG Movement Constraints

### 74.1. Dragon LNG

- Conventional ships to/from Dragon LNG can pass any ship at South Hook LNG.



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	29	

- Conventional ships to/from Dragon LNG can swing off Valero (Milford Shelf swinging grounds) with Valero 1 and 6 occupied.
- Q Flex outbound from Dragon LNG cannot pass a LNGC berthed at South Hook No 2 berth.
- Q Flex to Dragon LNG if swinging in the Milford Shelf swinging grounds may swing with Valero berth 1 and 6 occupied with one of the vessels having a beam under 25m. Weather indication at Milford Docks should be taken into account for the swinging aspect of this operation.
- Q Flex from Dragon LNG – may swing with Valero berth 1 or 6 occupied.

#### 74.2. South Hook LNG

- Vessels on berth 2 can depart if head out with berth 1 occupied.
- Q Flex head in can depart by swinging in the Milford Shelf swinging ground if Valero berths 1 or 6 are empty.
- Q Max berthed head in must wait until berth 1 (South Hook LNG is empty).

#### 74.3. For Clarification:

- Conventional LNG is a LNGC under 300m LOA not classed as Q Flex or Q Max and can be spherical or membrane construction.
- Q Flex is a LNGC of approximately 315m LOA.
- Q Max is a LNGC of approximately 345m LOA.


#### 74.4. Other constraints such as resource and weather limits apply.

### 75. Safe Speed When Transiting The Haven


75.1. All vessels regardless of size are to comply with The International Regulations for Preventing Collisions at Sea, Regulation 6 “Safe Speed” and Harbour Byelaw 20 “Navigate with Care”

75.2. Notwithstanding this fact all reporting vessels will, under normal circumstance, observe the following maximum speeds when within the Haven.

Sea to West Blockhouse –	Full Maneuvering Speed.
West Blockhouse to South Hook Buoy –	16 knots.
South Hook Buoy to Newton Noyes Jetty –	12 knots.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	30	

Newton Noyes Jetty to Cleddau Bridge – 10 knots.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	31	

# UNITED KINGDOM REGULATIONS FOR PORT ENTRY AND DEPARTURE

## **THE MERCHANT SHIPPING (VESSEL TRAFFIC MONITORING AND REPORTING REQUIREMENTS) REGULATIONS 2011 AS AMENDED**

For details of other reporting requirements see MSN 1899(M+F) –January 2020.

A completed Schedule 2 should be sent to Milford Haven VTS at least one hour before departure by all vessels required to take a Pilot or with a PEC (Ferry excepted).

## **DANGEROUS GOODS IN HARBOUR AREAS (DGHA) REGULATIONS 2016 RESPONSIBILITY**

**Masters** or **Agents** are responsible for informing the Milford Haven VTS and berth operator in advance which dangerous substances and in what amounts they are going to be brought into the harbour area. The normal minimum period of notice for entry of dangerous substances by (land or) sea is 24 hours. Where it is not reasonably practicable to give 24 hours' notice, the Harbourmaster and the berth operator together may agree to accept shorter notice.

Vessels carrying a dangerous substance should immediately inform the Milford Haven VTS on VHF channel 12 of any untoward incident which occurs or has occurred on the vessel. "Untoward incident" means an incident involving or threatening the containment of a dangerous substance.

## **DEFINITION**

**Dangerous Goods** are defined as those classified in the International Maritime Dangerous Goods Code (IMDG Code) in chapter 19 of the International Gas Carriers Code (IGC Code) and in chapter 17 of the International Bulk Carriers Code (IBC Code).


**Polluting Goods** are oil as defined in MARPOL Annex I, noxious liquid substances as defined in MARPOL Annex II and harmful substances as defined in MARPOL Annex III.

Bunkers, stores and equipment for use on board a vessel are not regarded as dangerous or polluting goods for the purpose of the Regulations.

For workboats delivering stores including Dangerous Goods, these are declared to Milford Haven VTS prior to movement. There are no specific restrictions to their movement within the waterway.

CERS III came into force on 1<sup>st</sup> April 2017 and requires all vessels over 300 GT arriving to and sailing from Milford Haven to complete an accurate CERS Workbook and forward it to the port at least 24 hours prior to arrival, or as soon as possible when the voyage time is less.

It is vital that all relevant parts of the CERS Workbook are completed prior to each arrival and departure from the port. Failure to submit a completed CERS Workbook prior to arrival and


Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	32	

departure could result in transit delays for the vessel.

The reporting requirements apply to all vessels over 300 GT arriving to and sailing from a UK port. It also applies to fishing vessels, traditional ships and recreational craft with a length of 45 metres or more. Ferries and other similar scheduled vessels may be exempt on receipt of a CERS exemption certificate. UK Warships and other government vessels as well as EEC Warships are exempt.





Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	33	

## 76. PORT GUIDELINES – JETTY INFORMATION

### JETTY – South Hook LNG Terminal

### OPERATOR – South Hook LNG Terminal Ltd

BERTH DETAILS	No. 1 BERTH	No. 2 BERTH	No. 3 BERTH
Length of Face	107m	107m	73m
Deck Height above Chart Datum	10m	10m	9.75m
Direction	096° - 276°	096° - 276°	080° - 260°
Control Depth	17.0	20.0	Berth not in use
Last Survey	2023	2023	2023
Control Depth – Approach	16.1m	16.1m	15.4m
Last Survey	2023	2023	2023
Max. DWT	190,000	190,000	36,000
Max. LOA			OUT OF SERVICE
Jetty Weight Limit	12t	12t	
Fresh Water	OOC	OOC	OOC
Lighting for Night Operation	OOC	OOC	OOC
FFA to DSHA Regs	OOC	OOC	OOC
Ship to Shore Access	OOC	OOC	OOC
Max speed berthing to fenders			
Waste	OOC	OOC	OOC

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

A.	Distance – Entrance to Jetty	4.5 miles.
B.	Pilot on Board to Berth	1½ hours.
C.	Tidal Stream Requirement	Dependent upon swinging and berthing plan.
D.	Swinging	Limiting depth in Swinging Area 10.8 metres.
E.	Tugs	As per guidelines – 4 tugs on all LNG movements. <b>Active Escort</b> Tug will use stern Emergency Towing Strong Point (200t SWL) Please clear lead and mooring bit.
F.	Mooring Boats/Gangs	2 mooring boats + mooring gang for all berthing operations.
G.	Communications	VHF working channel 9 or 15 S Hook No 1 etc.
H.	Known Obstructions	No.
I.	Adjacent Berth Movements	As per guidelines for LNG movements – exclusion zone, patrolvessel etc.
J.	Day/Night Operation	Yes.
K.	Remarks	No. 3 berth is not operational. Vessels are NOT permitted to berth.
		Maximum approach speed – 0.15 m/sec (0.29 knots).
L.	Operating Wind Limits Sustained	Stop cargo transfer – 35knots (18m/sec) Manoeuvring gangway (off or on) – 40knots (20m/sec) Disconnect cargo transfer equipment – 40knots (20m/sec) Terminal will review need to take further actions – 45knots (23m/sec) The wind readouts from Mid Channel Rock beacon will be used as default.
		Entry and transit parameters 25knots gusting 30knots maximum. Visibility parameter – not less than 1 nautical mile.
M.	Bunkering	Bunkering is not currently permitted.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mpha.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	34	

## JETTY – Puma Energy

## OPERATOR – Puma Energy UK Ltd

BERTH DETAILS	No. 1 BERTH	No. 2 BERTH	No. 3 BERTH
Length of Face	135m	70m	37m
Deck Height above Chart Datum	10m	10m	10m
Direction	075° - 255°	075° - 255°	075° - 255°
Control Depth	<b>17.9m</b>	<b>10.4m</b>	<b>Berth not in use</b>
Last Survey	<b>2023</b>	<b>2023</b>	<b>2023</b>
Control Depth – Approach	16.1m	16.1m	5.4m
Last Survey	<b>2023</b>	<b>2023</b>	<b>2023</b>
Max. DWT	275,000	40,000	7,000
Max. LOA	320m	201m	122m
Jetty Weight Limit	15 tonne – 2 axle lorry, 24 tonne vehicle weight.		
Fresh Water	Yes	Yes	Yes
Lighting for Night Operation	Yes	Yes	Yes
FFA to DSHA Regs	Yes	Yes	Yes
Ship to Shore Access	Gangway	Gangway	Berth face ladders
Waste	Yes	Yes	Yes

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	4.9 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1 hour.
<b>C.</b>	<b>Tidal Stream Requirement</b>	Valero swinging ground control depth = 9.3 metres.
<b>D.</b>	<b>Swinging</b>	Valero swinging ground control depth for vessel of 275m or over = 9.3 metres. Valero swinging ground control depth for vessel under 275m = 11.0 metres. Swinging off Puma Energy: to Pilots advice.
<b>E.</b>	<b>Tugs</b>	Tugs as per guidelines. Lineboat/tug required for small LPG vessels to Puma Energy 3.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring boats and gangs.
<b>G.</b>	<b>Communications</b>	Channel 9 or 15 VHF c/s “Puma Energy No 1” etc.
<b>H.</b>	<b>Known Obstructions</b>	Berth 3: distance from jetty face to FR lights 190 metres (5.6 metres dredged area).
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view main channel movements.
<b>J.</b>	<b>Day/Night Operation</b>	
<b>K.</b>	<b>Remarks</b>	Max. wind = 30 knots to berth at Puma Energy 3. The wind readouts from Mid Channel Rock beacon will be used as default.
<b>L.</b>	<b>VLCC, light arrival, laden departure</b>	Arrival in ballast berthing programmed for 3 hours before HW (draft allowing) for a swing off Valero and berthing bow west at Puma 1. Active Escort inbound, 4 tugs and Patrol If Valero 6 & 1 occupied, then 9.3m (valid at time of issue) is used for swing Sailing loaded to be planned for 1 ½ hr before HW with Active Escort and Patrol. Number of Tugs at pilots discretion. South Hook 2 berth empty for sailing.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	35	


### JETTY – Milford Dock

### OPERATOR – Milford Dock

BERTH DETAILS	No. H	No. I	No. Hakin	No. J
Length of Face	70m	70m	150m	200m
Deck Height above Chart Datum	5m	5m	5m	5m
Direction	290/110	330/150	010/190	300/120
Control Depth	For depths in Dock contact Pierhead Dock Ops Staff			
Last Survey	2021	2021	2021	2021
Control Depth – Approach	1.1m	In Docks approach channel – survey 2023		
Last Survey	2021	2021	2021	2021
Max. DWT	N/A	N/A	10,000	5,000
Max. LOA/Max. Beam	70m/19m	25m	130m/19m	75m/19m
RoRo Linkspan/jetty weight limit	Unknown			
Fresh Water	No	No	Yes	Yes
Lighting for Night Operation	No	No	Yes	Yes
FFA to DSHA Regs	No	No	Yes	Yes
Ship to Shore Access	No	No	Yes	Yes
Waste	Yes	Yes	Yes	Yes

### SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	6.0 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	Timed to enter at half tide i.e. 1 hour before HW to clear fishing vessels etc.
<b>C.</b>	<b>Tidal Stream Requirement</b>	A set to the West is a “rule of thumb” to be noted.
<b>D.</b>	<b>Swinging</b>	Normal max. length to swing a VSL with other VSLs alongside = 100 metres.
<b>E.</b>	<b>Tugs</b>	3 hours’ notice. Tug required for tankers – other vessels to pilot discretion.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Provided for all vessels over 60 metres.
<b>G.</b>	<b>Communications</b>	Pier Head works VHF channel 14 – Call Sign “Pier Head” Marina 37, c/s “Pier Head”. VHF channel 8 for large vessels requiring Dockmaster.
<b>H.</b>	<b>Known Obstructions</b>	Marina. Caisson when open partially obstructs inner entrance.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Fishing vessels moving to/from ice berth. Yachts moving to/from Marina.
<b>J.</b>	<b>Day/Night Operation</b>	Day and night.
<b>K.</b>	<b>Remarks</b>	Tankers are required to have a gas free certificate before entry.
		Speed on entry/exit to be minimum as lock gates and caisson gates affected by interaction even when tied back. Specific risk assessment may allow 2.0m control depth in approach channel.
		Pilotage guidelines using Milford Docks: 1. For vessels fitted with bow and stern thrusters max. beam 20.12 metres 2. For conventional vessels (no thrusters) max. beam 18.9 metres
		For protection of the caisson at least one tug should be in attendance for tanker movements
		Weather limits apply – max. wind speed for vessels over 50metres LOA = 25 knots measured at Pierhead.
<b>M.</b>	<b>Mackerel Stage</b>	An "Open Berth" Vessels should not be left unattended as it is exposed to southerly winds and wake from vessels in the Haven

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	36	


### JETTY – Milford Dry Dock

### OPERATOR – Haven Marine Services (Wales Ltd)

BERTH DETAILS	No. Dry Dock		
Length of Face	180m		
Deck Height above Chart Datum	5m		
Direction	310/130		
Control Depth	4.0m/7.5m		
Last Survey	N/A		
Control Depth – Approach	N/A		
Last Survey	N/A		
Max. DWT	N/A		
Max. LOA/Max Beam	180m/19m		
RoRo Linkspan/jetty weight limit			
Fresh Water	Yes		
Lighting for Night Operation	Yes		
FFA to DSHA Regs	Yes		
Ship to Shore Access	Gangway		
Waste	Yes		

### SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	
<b>B.</b>	<b>Pilot on Board to Berth</b>	
<b>C.</b>	<b>Tidal Stream Requirement</b>	
<b>D.</b>	<b>Swinging</b>	
<b>E.</b>	<b>Tugs</b>	
<b>F.</b>	<b>Mooring Boats/Gangs</b>	
<b>G.</b>	<b>Communications</b>	
<b>H.</b>	<b>Known Obstructions</b>	
<b>I.</b>	<b>Adjacent Berth Movements</b>	
<b>J.</b>	<b>Day/Night Operation</b>	
<b>K.</b>	<b>Remarks</b>	Continued from Milford Docks Pilotage Guidelines:
		1. Squat allowance: vessels of 12 – 18 metres beam = 0.3 metres.
		2. Vessels in excess of 18 metres beam = 0.6 metres. Such allowance added to normal draft plus 10% figure.
		3. Maximum width lock gates = 20.5 metres with fenders removed.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	37	

## Jetty – Valero

## Valero Energy Corp

BERTH DETAILS	No. 8 BERTH	No. 7 BERTH	No. 6 BERTH	No. 1 BERTH
Length of Face	75m	75m	114m	123m
Deck Height above Chart Datum	10.8m	10.8m	10.8m	11m
Direction	085° - 265°	085° - 265°	085° - 265°	088° - 268°
Control Depth	<b>15.5m</b>	<b>13.9m</b>	<b>18.0m</b>	<b>18.2m</b>
Last Survey	<b>2023</b>	<b>2022</b>	<b>2022</b>	<b>2022</b>
Control Depth – Approach	16.1m	16.1m	16.1m	16.1m
Last Survey	<b>2023</b>	<b>2023</b>	<b>2023</b>	<b>2023</b>
Max. DWT	60,000	60,000	270,000	275,000
Max. LOA	240m	240m	365m	365m
Min. LOA	61m	61m	185m	70m
Jetty Weight Limit	13.0t	13.0t	13.0t	13.4t
Fresh Water	No	No	No	No
Lighting for Night Operation	Yes	Yes	Yes	Yes
FFA to DSHA Regs	Yes	Yes	Yes	Yes
Ship to Shore Access	Yes	Yes	Gangway	Ggwy & BF lad
Waste	Yes	Yes	Yes	Yes

### SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	6 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1 to 1½ hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	
<b>D.</b>	<b>Swinging</b>	Valero swinging ground control depth for vessel of <b>275m or over</b> = 9.2 metres. Valero swinging ground control depth for vessel <b>under 275m</b> = 11.0 metres
<b>E.</b>	<b>Tugs</b>	Tugs as per guidelines. Pilots advice, Masters request.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring boats and gangs.
<b>G.</b>	<b>Communications</b>	Channel 15 or 9 VHF. c/s “Valero No 1” etc.
<b>H.</b>	<b>Known Obstructions</b>	None known.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view main channel movements.
<b>J.</b>	<b>Day/Night Operation</b>	Day and night.
<b>K.</b>	<b>Remarks</b>	<ol style="list-style-type: none"> <li>In the right conditions it may be possible to extend some of the DWT limits.</li> <li><b>Berth 8 MIN DWT 12,000 tonnes – with exception of Thun G class vessels. Inner berth bollards are not to be used for mooring</b></li> </ol>
<b>L.</b>	<b>CLAUS and WILLY to Valero 1</b>	<ol style="list-style-type: none"> <li>A lineboat to be immediately available for pushing up while either of these ships berth to Valero Berth 1.</li> <li>The boat must be in attendance should the wind or forecast be 12 knots or greater and from 090-180- 270 degrees.</li> <li>The wind readouts from Mid Channel Rock beacon will be used as default.</li> </ol>



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	38	

BERTH DETAILS	No. 2 BERTH	No. 3 BERTH	No. 4 BERTH	No. 5 BERTH
Length of Face	98m	62m	37m	37m
Deck Height above Chart Datum	11m	11m	11m	11m
Direction	090° - 270°	090° - 270°	089° - 269°	089° - 269°
Control Depth	13.9m	11.3m	5.6m	5.6m
Last Survey	2023	2023	2023	2023
Control Depth – Approach	16.1m	13.2m	4.9m	4.9m
Last Survey	2023	2023	2023	2023
Max. DWT	100,000	35,000	2,500	6,000
Max. LOA/Cu M (LPG)	270/85,000 (LPG)	240/50,000 (LPG)	75m	100m
Min. LOA	120m	70m		
Jetty Weight Limit	13.4t	13.4t	13.4t	13.4t
Fresh Water	No	No	No	No
Lighting for Night Operation	Yes	Yes	Yes	Yes
FFA to DSHA Regs	Yes	Yes	Yes	Yes
Ship to Shore Access	Gangway	Berth Face Ladders	Berth Face Ladders	Berth Face Ladders
Waste	Yes	Yes	Yes	Yes

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	6 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1 to 1½ hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	C & D for berths 2 and 3.
<b>D.</b>	<b>Swinging</b>	Due care should be taken of wind and tidal stream conditions. Over 90 metres LOA without bow thrust only floodtide when berthing.
<b>E.</b>	<b>Tugs</b>	Up to 2 small tugs, depending on weather and tidal stream conditions at berths 4 and 5.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring boats and gangs.
<b>G.</b>	<b>Communications</b>	Channel 15 or 9 VHF. c/s “Valero No 2” etc.
<b>H.</b>	<b>Known Obstructions</b>	Berths 4 & 5, distance from jetty face to FR lights 125m.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view main channel movements.
<b>J.</b>	<b>Day/Night Operation</b>	Day and night.
<b>K.</b>	<b>Remarks</b>	Berthing on numbers 4 and 5 may be on ebb tide. Restricted in easterly winds of greater than 20 knots particularly on spring ebb tides.
		Minimum distance between vessels on berths 4 & 5 is 30m.
<b>L.</b>	<b>Max Approach speed to fenders</b>	Max speed of approach whilst berthing at Valero Pembroke is 0.15mtrs/second (just under 0.3knts) at a 10deg max angle to berth.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT


mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	39	

<b>BERTH DETAILS</b>	<b>No. RO RO</b>		
Length of Face	27m	Face to north dolphin 93m	
Deck Height above Chart Datum	7.9m		
Direction	175° - 355°		
Control Depth	<b>-2.6m</b>	<b>0.3m 27 metres from face</b>	
Last Survey	<b>2019</b>		
Control Depth – Approach	<b>-0.2m</b>		
Last Survey	<b>2019</b>		
Max. DWT	Each load is calculated first and any additional requirements are arranged prior to load arrival.		
Max. LOA			
RoRo Linkspan/Jetty Weight Limit			
Fresh Water			
Lighting for Night Operation	Portable		
FFA to DSHA Regs			
Ship to Shore Access			
Waste	Yes		

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	6 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1 to 1½ hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	
<b>D.</b>	<b>Swinging</b>	Flood tide and HW slack only
<b>E.</b>	<b>Tugs</b>	To Pilot's advice.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring boats and gangs.
<b>G.</b>	<b>Communications</b>	Channel 15 or 9 VHF. c/s "Valero Ro Ro".
<b>H.</b>	<b>Known Obstructions</b>	
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view main channel movements.
<b>J.</b>	<b>Day/Night Operation</b>	Daylight berthing and unberthing only. A Nighttime transit can be considered and discussed on a case by case exceptional circumstance based, supported with details RAMS including consideration of the following: i) Tug skippers must be familiar with the location and have undertaken at least 3 approaches / departures from the area previously in daylight. ii) Steady wind speeds, if Easterly should not exceed 20kts (MCR data). iii) Visibility in the area must be at least 1 mile. iv) The RoRo area and roadway will be well illuminated with suitably controlled lighting.
<b>K.</b>	<b>Remarks</b>	All Ro Ro operations will require a <b>passage/tow plan to be submitted before commencement. If necessary, a planning meeting may also be required.</b>

Document Type	General Procedure			 Port of Milford Haven
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	40	

### JETTY – VPOT

### OPERATOR – Valero Pembrokeshire Oil Terminal


BERTH DETAILS	No. 2 BERTH	No. 3 BERTH	No. RO RO
Length of Face	121m	63m	
Deck Height above Chart Datum	10.67m	10.67m	
Direction	098° - 278°	098° - 278°	098° - 278°
Control Depth	14.1m	10.1m	
Last Survey	2023	2023	
Control Depth – Approach	11.8m	11.8m	
Last Survey	2023	2023	
Max. DWT	165,000	20,000	
Max. LOA	283m	153m	
Approach Road/Jetty Weight Limit	30te/axel	30te/axel	
Fresh Water	No	No	
Lighting for Night Operation	Yes	Yes	
FFA to DSHA Regs	Yes	Yes	
Max. speed approach to fenders			
Ship to Shore Access	Gangway	Underberth walkway	
Waste	Yes	Yes	

### SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	7.3 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1½ to 2 hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	C & D berthing & unberthing.
<b>D.</b>	<b>Swinging</b>	Swinging area control depth <b>11.9 m - 2021</b>
<b>E.</b>	<b>Tugs</b>	Tugs as per guidelines.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Vessels under 10kt – 1 rope runner and 2 mooring gang personnel. Vessels over 10kt – 2 rope runners and 4 mooring gang personnel. Rope runners will not work for berthing vessels until there is 2m of tide. This to be borne in mind for accepting bookings
<b>G.</b>	<b>Communications</b>	
<b>H.</b>	<b>Known Obstructions</b>	None known.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view ferry movements.
<b>J.</b>	<b>Day/Night Operation</b>	Day and night.


	Condition	LOA	Remarks	Dragon Berth
<b>Berthing</b>	Loaded	<220m	Any time at Pilot's discretion	Occupied
	Ballast	<220m	Any time at Pilot's discretion	Occupied
	Loaded PST	>220m to <250m	Ebb Tide	Occupied
	Loaded SST	>220m to <250m	Swing and back down <b>not</b> an option due to draft & Control Depth restrictions	
	Ballast PST	>220m to <250m	Ebb Tide	Occupied



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	41	

	Ballast SST <sup>1</sup>	>220m to <250m	Swing and back down (3-4 tugs)	Unoccupied
	Loaded PST	>250m	Ebb Tide	Occupied
	Loaded SST	>250m	Swing and back down <b>not</b> an option due to draft Control Depths restrictions	
	Ballast PST	>250m	Ebb Tide	Occupied
	Ballast SST <sup>1</sup>	>250m	Swing and back down (3-4 tugs)	Unoccupied
<b>Departure</b>	Loaded	<220m	Any time at Pilot's discretion	Occupied
	Ballast	<220m	Any time at Pilot's discretion	Occupied
	Loaded PST	>220m to <250m	Ebb Tide only	At Pilot's discretion
	Loaded SST	>220m to <250m	Any time at Pilot's discretion <sup>1</sup>	Occupied
	Ballast PST	>220m to <250m	Ebb Tide only	At Pilot's discretion
	Ballast SST	>220m to <250m	Any time at Pilot's discretion	Occupied
	Loaded PST <sup>1</sup>	>250m	Back down and swing at HW (4 tugs)	Unoccupied
	Loaded SST	>250m	Any time at Pilot's discretion	At Pilot's discretion
	Ballast PST <sup>1</sup>	>250m	Back down and swing on an Ebb Tide (4 tugs) <b>or</b> swing off berth (at Pilot's discretion)	Unoccupied
	Ballast SST	>250m	Any time at Pilot's discretion	At Pilot's discretion

1. The max. sustained wind, at 10m elevation, in which a vessel is allowed to berth/sail, is 25 knots with gusts of 30 knots except if the wind is Southerly, then the limit is 20 knots with gusts of 25 knots. The wind readouts from MCR Beacon will be used as default.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	42	

## JETTY – Dragon LNG

## OPERATOR – Dragon LNG

BERTH DETAILS	No. 1 BERTH		
Length of Face	192m		
Deck Height above Chart Datum	11.46m		
Direction	098° - 278°		
Control Depth	<b>13.7m</b>		
Last Survey	<b>2023</b>		
Control Depth – Approach	10.7m		
Last Survey	<b>2023</b>		
Max. DWT	150,000		
Max. LOA	300m (320m)*		
Approach Road/Jetty Weight Limit	30t		
Fresh Water	No		
Lighting for Night Operation	Yes		
FFA to DSHA Regs	Yes		
Ship to Shore Access	Gangway		
Waste	Via barge**		

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	7.0 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1.5 – 2.0 hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	C & D.
<b>D.</b>	<b>Swinging</b>	Valero swinging ground: control depth for vessel of 275m or over = 9.3 metres. Valero swinging ground control depth for vessel under 275m = 11.0metres.
<b>E.</b>	<b>Tugs</b>	Min. 4 required as per Port Guidelines and one stand-by while v/l alongside.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	2 mooring boats (8tbp) & gangs provided at terminal.
<b>G.</b>	<b>Communications</b>	VHF 15 & 9/Electrical Pyle National 37 pin/Miyak/Fibre Optic.
<b>H.</b>	<b>Known Obstructions</b>	None known.
<b>I.</b>	<b>Adjacent Berth Movements</b>	None during LNGC movements.
<b>J.</b>	<b>Day/Night Operation</b>	Day/night operation.
<b>K.</b>	<b>Remarks</b>	Maximum berth approach angle 7° (0 preferred).
		Maximum berth approach speed 10cm/sec. When touching fenders 8cm/sec.
		Docking display board located to the east of loading arms on loadingarm platform and indicates distance off and speed of approach of bow and stern.
		The max. sustained wind, at 10 metres elevation, in which a v/l is allowed to berth/sail, is 25 knots with gusts of 30 knots except if the wind is southerly then the limit is 20 knots with gusts of 25 knots. The wind readouts from Mid Channel Rock beacon will be used as default.
		LNGC's are not permitted to enter the Haven or move if the visibility is less than 1 nautical mile.
<b>L.</b>	<b>Wind Operating Limits (sustained)</b>	Stop cargo transfer 32 knots, disconnect 40 knots.
<b>M.</b>	<b>Bunkering</b>	Bunkering is not permitted.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	43	

## JETTY – Power Station Ro Ro

## OPERATOR – RWE

BERTH DETAILS	No. RO RO			
Length of Face	19.4m			
Deck Height above Chart Datum	9.35m			
Direction	East/West	(end on)		
Control Depth	-1.1m			
Last Survey	2022			
Control Depth – Approach	1.0m			
Last Survey	2022			
Max. DWT	Berth designed for CEEB heavy load carriers – end on berthing.			
Max. LOA	82.5m for alongside berthing.			
Ro Ro Linkspan/Jetty Weight Limit				
Fresh Water	Yes			
Lighting for Night Operation	Yes			
FFA to DSHA Regs	No			
Ship to Shore Access	Via ramp			
Waste	Yes			

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	9.0 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1½ to 2 hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	High water.
<b>D.</b>	<b>Swinging</b>	
<b>E.</b>	<b>Tugs</b>	To pilots advice.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring boat and gang.
<b>G.</b>	<b>Communications</b>	VHF Channel 9 & 15. c/s “Power Station Ro Ro”.
<b>H.</b>	<b>Known Obstructions</b>	Pennar Gut silts up very quickly so the above control depth should not be relied on.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view ferry movements.
<b>J.</b>	<b>Day/Night Operation</b>	Night operation – buoyage leading to the power station jetty in Pennar Gut is unlit. Nighttime operations only by specific risk assessment.
<b>K.</b>	<b>Remarks</b>	Arrival criteria: vessel to pass Pennar Point between 1½ hours before HW Milford Haven and 1½ hours after high water.
		Departure criteria: vessel to pass Pennar Point before HW Milford Haven. Latest Pilot boarding time - ½ hour before HW Milford Haven.
		For tug and barge work – dependent on UKC.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	44	

## JETTY – Carr Jetty

## OPERATOR – MOD

BERTH DETAILS	No. LONG ARM	No. SHORT ARM		
Length of Face	115m	50m		
Deck Height above Chart Datum	9.3m	9.3m		
Direction	139° - 319°	049° - 229°		
Control Depth	8.0m	4.6m		
Last Survey	2023	2023		
Control Depth – Approach	6.7m*	5.3m	*approaching from east.	
Last Survey	2023	2023		
Max. DWT				
Max. LOA	151m	50m		
Jetty Weight Limit				
Fresh Water	Yes	Yes		
Lighting for Night Operation	Yes	Yes		
FFA to DSHA Regs	Yes	Yes		
Ship to Shore Access	Gangways	Gangways		
Waste	On request	On request		

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	8.6 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1½ to 2 hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	Large vessels normally berth on flood tide or slack water depending on length and draft.
<b>D.</b>	<b>Swinging</b>	Large vessels normally berth head north (port side to) on the long arm.
<b>E.</b>	<b>Tugs</b>	Up to 2 tugs.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring gang only.
<b>G.</b>	<b>Communications</b>	Internal Svitzer.
<b>H.</b>	<b>Known Obstructions</b>	Unlit targets on Dockyard Bank.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view ferry and POP movements. Only one large vessel.
<b>J.</b>	<b>Day/Night Operation</b>	Day and night.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	45	

## JETTY – Pembroke Dock Ferry Terminal

## OPERATOR – Pembroke Port

BERTH DETAILS	No. RO RO		
Length of Face (Upper and Lower)	12m - ramps	190m - berth	
Deck Height above Chart Datum	Ramp 2.2m to 4.95m		
Direction	086½° - 266½°		
Control Depth	<b>7.5m</b>		
Last Survey	<b>2023</b>		
Control Depth – Approach	6.8m		
Last Survey	<b>2023</b>		
Max. DWT	6,000		
Max. LOA	185m		
RoRo Linkspan/Jetty Weight Limit	Lower 90t - Upper 44t		
Fresh Water	Yes		
Lighting for Night Operation	Yes		
FFA to DSHA Regs	Yes		
Ship to Shore Access	Stern Linkspan		
Waste	Skip on pontoon		

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	9.3 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1½ to 2 hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	No special requirement.
<b>D.</b>	<b>Swinging</b>	Stern to the pontoon, vessels swing NE of the berth.
<b>E.</b>	<b>Tugs</b>	To Pilot's/Master's request, usually for weather.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring gang only.
<b>G.</b>	<b>Communications</b>	Channel 9 or 15 VHF. c/s "Ferry Terminal".
<b>H.</b>	<b>Known Obstructions</b>	Unlit targets on Dockyard Bank.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Keep in view Carr Jetty and POP. Only one large vessel movement at a time above the Wear.
<b>J.</b>	<b>Day/Night Operation</b>	
<b>K.</b>	<b>Remarks</b>	Keep in view vessels with "Visor" bows when berthing bow on because they may foul upper deck of pontoon.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	46	

## JETTY – Pembroke Port

## OPERATOR – Pembroke Port

BERTH DETAILS	No. 1 QUAY	No. 2 QUAY	No. 3 QUAY	Slipway
Length of Face	180m	100m	65m	54m
Deck Height above Chart Datum	8.8m	8.8m	Wedge	0
Direction	104° - 284°	014° - 194°	012° - 192°	017° - 197°
Control Depth	6.9/6.4/4.4 (depending on berth box)	5.0m	1.4m	-3.3m
Last Survey	2023	2023	2023	2022
Control Depth – Approach	4.6m	4.1m	2.4m	1.0m
Last Survey	2023	2023	2023	2022
Max. DWT				
Max. LOA	168m	96m		
RoRo Linkspan/Jetty Weight Limit				
Fresh Water	On request	On request	On request	On request
Lighting for Night Operation	Yes	Yes	Yes	Yes
FFA to DSHA Regs	Yes	Yes	Yes	Yes
Ship to Shore Access	Vessel to provide	Vessel to provide	Vessel to provide	Vessel to provide
Waste	On request	On request	On request	On request

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	9.4 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	1½ to 2 hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	Vessels of up to 100 metres LOA berth anytime on Quay 1. Vessels of 100 metres to 120 metres at Pilots option, over 120 metres LOA only slack water berthing.
<b>D.</b>	<b>Swinging</b>	
<b>E.</b>	<b>Tugs</b>	Up to 2 tugs for large vessels, tugs may be required for Quays 2 & 3.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring gang only.
<b>G.</b>	<b>Communications</b>	Channel 8 VHF. c/s “Port of Pembroke”.
<b>H.</b>	<b>Known Obstructions</b>	Approaches and berths liable to rapid siltation.
<b>I.</b>	<b>Adjacent Berth Movements</b>	Ferry Terminal keep in view ferry movements. Only one large vessel.
<b>J.</b>	<b>Day/Night Operation</b>	
<b>K.</b>	<b>Remarks</b>	<b>Contact Port of Pembroke for details</b>
	<b>POP I</b>	<ol style="list-style-type: none"> <li>1. Fully operational DP vessels may berth under different requirements.</li> <li>2. Loaded cargo vessels (at pilot’s discretion) may require a small tug.</li> <li>3. In instances where berth number 1 is occupied and another vessel is stemmed to berth there, the following shall be applied: <ul style="list-style-type: none"> <li>• Berth clearance (continuous clear quay wall</li> </ul> </li> </ol>



Safety



Excellence




Collaboration




Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	47	

		<p>space) requirements – 1.5 X ship length rounded up to nearest 10m. E.g., 90m vessel X 1.5 = 135m therefore 140m clear quay wall space required.</p> <ul style="list-style-type: none"> <li>Berth 1 max vessel length 168m</li> </ul> <p>E.g., 168m – 140m = 28m e.g., Tug / small craft + 90m cargo vessel in total.</p>
	<b>POP2</b>	<ol style="list-style-type: none"> <li>Control depth for Quay 2 is <b>3.7m</b> for vessels up to 80m LOA.</li> <li>All vessels (except Whithaven) bound for POP2 will require 1 small tug.</li> </ol>
	<b>POP3</b>	<ol style="list-style-type: none"> <li>Control depth for Quay 3 is <b>1.2m</b> for vessels up to 55m LOA.</li> </ol>
		<p>The guidelines above may be amended at Pilot's discretion depending on the weather, tidal state and known ship's limitations and equipment, i.e. bow and stern thrusters, twin screw vessels, high lift rudders, etc.</p>

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	48	

## JETTY – PDFT Work Boat Pontoons

## OPERATOR – Pembroke Port

BERTH DETAILS	A	B	C	D	E
Length of Face	25m	25m	25m	25m	25m
	50m		50m		25m
Deck Height above Chart Datum	1.2m				
Direction	110° - 290°		090° - 270°		045° - 225°
Control Depth	3.3	3.3	3.8	3.8	5.5
Last Survey	2023	2023	2023	2023	2023
Control Depth – Approach	1.6	1.6	1.6	1.6	4.6
Last Survey	2023	2023	2023	2023	2023
Max. DWT	100t	100t	100t	100t	100t
	200t		200t		100t
Max. LOA	20m	20m	20m	20m	20m
	40m		40m		20m
Jetty WeightLimit	Tba	Tba	Tba	Tba	Tba
Fresh Water					
Lighting for Night Operation	Yes	Yes	Yes	Yes	Yes
FFA to DSHA Regs	Yes	Yes	Yes	Yes	Yes
Ship to Shore Access	Yes	Yes	Yes	Yes	Yes
Waste	On request	On request	On request	On request	On request

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

A.	Distance – Entrance to Jetty	9.4 miles.
B.	Pilot on Board to Berth	2 hours.
C.	Tidal Stream Requirement	To Pilot's advice.
D.	Swinging	To Pilot's advice.
E.	Tugs	To Pilot's advice.
F.	Mooring Boats/Gangs	Self-Moor, or Mooring Gang on request
G.	Communications	Channels 15 or 9 VHF. c/s "Pembroke Port". Call "VTS" Ch12 before any movements
H.	Known Obstructions	.
I.	Adjacent Berth Movements	Ferry Movements, Port of Pembroke Q1, Q2 and Q3 movements
J.	Day/Night Operation	Day and night.
K.	Remarks	The pontoons are adjacent to PDFT, Master's to moor vessel to take into account ferry movements including any wash or movement of water. Vessels should not be left unattended on Pontoon E without prior agreement with Pembroke Port.



Safety



Excellence



Collaboration




Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	49	

## JETTY – Offshore Jetty

## OPERATOR – Pembroke Port

BERTH DETAILS	No.		
Length of Face	30m		
Deck Height above Chart Datum	9.2m		
Direction	073° - 253°		
Control Depth	5.2m		
Last Survey	2023		
Control Depth – Approach	5.2m		
Last Survey	2023		
Max. DWT	6,500 (approx.)		
Max. LOA	30m max. beam		
RoRo Linkspan/Jetty Weight Limit	Out of commission		
Fresh Water			
Lighting for Night Operation			
FFA to DSHA Regs			
Ship to Shore Access			
Waste			

## SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	9.4 miles.
<b>B.</b>	<b>Pilot on Board to Berth</b>	2 hours.
<b>C.</b>	<b>Tidal Stream Requirement</b>	To Pilot's advice.
<b>D.</b>	<b>Swinging</b>	No special requirements.
<b>E.</b>	<b>Tugs</b>	To Pilot's advice.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring gang only.
<b>G.</b>	<b>Communications</b>	Channels 15 or 9 VHF. c/s "Offshore Jetty".
<b>H.</b>	<b>Known Obstructions</b>	Disused cables on seabed in the swinging areas off the berth.
<b>I.</b>	<b>Adjacent Berth Movements</b>	None. Keep in view ferry movements.
<b>J.</b>	<b>Day/Night Operation</b>	Day and night.
<b>K.</b>	<b>Remarks</b>	The berth is currently out of commission.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	50	

### JETTY – Waterloo Quay

### OPERATOR – Ledwood Construction Ltd

<b>BERTH DETAILS</b>	<b>No.</b>		
Length of Face	40m		
Deck Height above Chart Datum	8.2m		
Direction	313° - 133°		
Control Depth	-3.70m	Drying height	(By observation 05/21)
Last Survey	Jun-05		
Control Depth – Approach	-3.45m	Drying height	(By observation 05/21)
Last Survey	Jun-05		
Max. DWT			
Max. LOA	79m		
Jetty Weight Limit	500t	45t point loading	
Fresh Water	On request		
Lighting for Night Operation	Yes		
FFA to DSHA Regs	No		
Ship to Shore Access	None		
Waste	On request		

### SAILING DIRECTIONS FOR BERTHING AND UNBERTHING

<b>A.</b>	<b>Distance – Entrance to Jetty</b>	10.8 miles
<b>B.</b>	<b>Pilot on Board to Berth</b>	Approx. 2½ hours before HW (arrival). Approx. 1 hour before HW (dep.).
<b>C.</b>	<b>Tidal Stream Requirement</b>	Arrive and depart Cosheston Pill before ebb is away in the river.
<b>D.</b>	<b>Swinging</b>	No special requirements.
<b>E.</b>	<b>Tugs</b>	2 small tugs or large work launches to be considered for large barges. Reviewed on a case by case basis.
<b>F.</b>	<b>Mooring Boats/Gangs</b>	Mooring gang only.
<b>G.</b>	<b>Communications</b>	Channels 15 or 9 VHF. c/s “Waterloo Quay”.
<b>H.</b>	<b>Known Obstructions</b>	Obstruction on seabed SE side of berth marked with red stripe on adjacent Larsen pile. Bridge height 37 metres.
<b>I.</b>	<b>Adjacent Berth Movements</b>	None. Keep in view ferry movements.
<b>J.</b>	<b>Day/Night Operation</b>	Daylight berthing/unberthing only.
<b>K.</b>	<b>Remarks</b>	Seabed and control depth at berth should be checked before vessels proceed to this berth.



Safety



Excellence




Collaboration



Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	51	

## 77. PORT GUIDELINES – JETTY MOORING ARRANGEMENT

### 77.1. VALERO PEMBROKESHIRE OIL TERMINAL

#### **(VPOT)0-3,000 TONNES DEADWEIGHT**

Normal conditions	2-1-2 each end
If no breast lines	2-0-2 each end
Heavy weather	West end 3-1-2 East end 2-1-3
If no breast lines	

West end 3-0-2 East end 2-0-3

#### **3,000 – 10,000 TONNES DEADWEIGHT**

Normal conditions	3-2-2 each end
West end 4-2-2 East end 3-2-3	

#### **10,000 TONNES AND ABOVE**

Normal conditions	3-2-2 each end
West end 4-2-2 East end 3-2-3	

#### **IN HEAVY WEATHER FOR VESSELS 50,000 TONNES AND ABOVE**

West end	4-3-2
East end	3-2-4

Heavy weather = Force 9 (45 knots) and above.

#### **SHORE WIRES**

There are no shore wires at VPOT.

#### **DRAGON LNG**


4-2-4 EACH END

#### **PUMA ENERGY MILFORD TERMINAL**

##### **NO 1 BERTH**

VLCC's	4-2-2 each end
<b>80,000 tonnes plus</b>	<b>3-2-2 each end</b>
<b>16,000 tonnes product ships</b>	<b>2-2-2 each end</b>

##### **NO 2 BERTH**

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	52	

1,000 tonnes max.	1-0-1 each end LPG vessels	1-0-2 each end
5,000 tonnes max.	4-0-1 each end LPG vessels	4-0-2 each end
30,000 tonnes max.	2-2-2 each end	end

### NO 3 BERTH

1,000 tonnes max.	2-0-2 each end
5,000 tonnes max.	2-1-2 each end

(Breast lines lead forward and aft)

### SHORE WIRES

There are no shore wires at Puma Energy.

### VALERO

Ship Size	Head and Stern Moorings	Head and Stern Breast or Intermediate Moorings	Head or Stern Springs
2,000 DWT – 4,999 DWT	2 each end		2 each end
5,000 DWT – 9,999 DWT	2 each end	1 each end	2 each end
10,000 DWT – 29,999 DWT	2 each end	2 each end	2 each end
30,000 DWT – 99,999 DWT	3 each end	2 each end	2 each end
100,000 DWT and above	4 each end	2 each end	2 each end

For vessels on berths 4 and 5 up to 6,000 DWT springs 2 headlines/sternlines.

For severe weather, moorings to be increased in line with availability of ships leads, suitable moorings.


On some ships it may not be possible to run breast lines as well as head/stern lines, where this is not possible the head and stern moorings should be increased.

### SHORE WIRES

Shore wires not available.

### MOORING BOAT DEPLOYMENT

A mooring boat with Coxswain in attendance is kept at the Valero terminal at all times when ships are alongside; this is for running additional moorings and other duties. The boat is only removed when ships are alongside if the Coxswain considers it is unsafe to station the boat at the terminal. In this case the mooring boat will be stationed at the closest safe point to the terminal.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	53	

## NORMAL MOORING BOATS DEPLOYMENT

All vessels up to 10,000 DWT: 1 mooring boat and 1 mooring gang consisting of 2 linesmen.

Vessels over 10,000 DWT unless ship's Master requests otherwise: 2 mooring boats and 2 mooring gang consisting of 4 linesmen.

## SOUTH HOOK LNG TERMINAL

### BERTH 1

125,000 – 140,000 m <sup>3</sup>	3-3-2
140,000 – 180,000 m <sup>3</sup>	3-3-2
180,000 – 235,000 m <sup>3</sup>	2-2-3-2
235,000 – 270,000 m <sup>3</sup>	See ship specific mooring plans vessels.

### BERTH 2

125,000 – 140,000 m <sup>3</sup>	3-3-2
140,000 – 180,000 m <sup>3</sup>	3-3-2
180,000 – 235,000 m <sup>3</sup>	2-2-3-2
235,000 – 270,000 m <sup>3</sup>	See ship specific mooring plans for vessels.

### Wind Limits for Cargo Transfer Operations (five minute Average Wind Speed)

- **Stop cargo transfer** = 35 knots (18m/sec)
- **Maneuvering gangway (off or on)** = 40 knots (20 m/sec)
- **Disconnect cargo transfer equipment** = 40 knots (20 m/sec)
- **Review need for further action** = 40 knots (20 m/sec)
- **Loading arm operating limit** = 43 knots (22.5 m/sec)
- **Take further action (e.g. tugs to push up)** = 45 knots (23 m/sec)

## SHORE WIRES


Shore wires are not available at South Hook LNG terminal.

## MOORING BOAT DEPLOYMENT

Two mooring boats will be used for all berthing operations. A mooring boat will be available for running additional moorings and other duties at all times while a vessel is alongside for the terminal unless weather, sea conditions or other circumstances are such that it is not safe for a mooring boat to be deployed at the terminal.

## TUG ROPERUNNER OPERATIONAL DUTIES – BERTHING



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	54	

## **BERTHING OF VESSELS WITH NO HARBOUR TUGS IN ATTENDANCE (OVER 10K)**

Tug Rope Runner + 1 Rope Runner.

If the vessel needs the springs run across the berth, this will be carried out by a rope runner. The tug rope runner cannot escape under the berth so the Coxswain will only carry out this operation if he is assured that the vessel will be held off the berth until the tug rope runner is clear of the area.

## **BERTHING OF VESSELS WITH HARBOUR TUGS IN ATTENDANCE**

Tug Rope Runner + 1 Rope Runner or 2 Rope Runners (optional).

If the tug rope runner is used, the rope runner only will be used to cross springs. The tug rope runner can only be used to run springs to the berth ends.

## **BERTHING OF VESSELS UNDER 10K**

Tug Rope Runner and Rope Runner (if required).

Tug rope runner will be used to assist a vessel alongside, hold in position until springs are placed, then the tug rope runner will proceed to run the bow and stern mooring ropes/wires.

In the event of a vessel berthing on to berths 4 or 5 at high water and it is not possible for the tugrope runner to run the mooring ropes, then it will assist alongside, return to the pontoon then the operation will be completed with a rope runner.

Additional mooring boats can be ordered if required if one hour's minimum notice is given to the terminal.

## **SAFETY SIGNALS WHEN RUNNING LINES**

Whilst berthing, if there is an issue with a rope or wire being heaved up before crew are ready on atug or mooring boat, or if vessel does not pay out sufficient rope/wire then the mooring boat coxswain or the Tug Master will sound **6 SHORT BLASTS** to warn the deck crew whilst informing the Pilot / Master via VHF of the situation.


## **JETTY WIND PARAMETERS FOR LOADING / DISCHARGING / BALLASTING / DEBALLASTING**

### **VALERO**

The "heavy weather" parameter is 40 knots. Terminal operations are suspended when mean wind speeds exceed this figure or where regular gusting above 40 knots gives the terminal or the ship cause for concern.

### **PUMA ENERGY**



Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	55	

Winds in excess of 35 knots (sustained gusts) – loading, etc. suspended. Winds in excess of 40 knots (sustained gusts) – vessel disconnected.

### **VALERO PEMBROKESHIRE OIL TERMINAL (VPOT)**

During sustained winds of 45 knots or more all-cargo operations are shut down and consideration given to disconnecting if it is safe to do so. Unless of course the Master raises concerns prior to this, when all cargo operations will be shut down immediately.

### **DRAGON LNG**


Wind in excess of 32 knots – stop cargo transfer. Wind in excess of 40 knots – disconnect cargo. Wind in excess of 48 knots – remove gangway.

### **MIXED MOORINGS**

Mariners should be aware of the dangers in the use of mixed moorings.

Generally mooring lines of the same size and material should be used for all leads, if this is not possible due to the available equipment, all lines in the same service, i.e. breast lines, spring lines, head and stern lines should be of the same size and material.

The use of mixed moorings for similar service comprising full length synthetic ropes used in conjunction with wires, should be avoided. If a synthetic rope and a wire are used in the same service the wire will carry almost the entire load while the synthetic rope carries practically none.

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	56	

## ACTIVE ESCORTING

### GUIDELINES FOR PILOTS

- (1) Active escorting will be weather limited, the decision to connect and the position of the start of the escort will be made after agreement with the tug Master. The active escort tug will determine if he can make fast using swell height as shown on the Mid Channel Rock. He will also proceed to sea to determine conditions if marginal. LNGC's must be Active escorted.
- (2) Weather permitting, inbound vessels will be Active escorted from zone 4 to the rendezvous position with the berthing tugs, outbound vessels will be Active escorted from a position off the berth until clear of the entrance buoys in zone 3 or when ordered to disconnect by the Pilot (see chartlet on next page).
- (3) Pilots are to ascertain from the Master which leads and bollards are suitable for attaching the towline.
- (4) **Pilots are to advise the Master:**
  - a. The likely towline forces to be encountered.
  - b. The speed of passage and the speed of the tug.
  - c. Method by which the ship's crew should take on and release the towline.
  - d. Areas of transit posing particular risks with respect to possible use of the tug.
  - e. Primary and secondary VHF channels and the availability of a rate of turn indicator and its operational state.

#### **Pilot/Tug Master Exchange:**

- a. Position and SWL of attachment point.
- b. Mode of escorting depending on conditions. This will always be active on LNGC.
- c. Berthing arrangements and repositioning of escort tug.
- d. Any unusual characteristics of the vessel as gleaned from the Master.
- e. Pilots and tug Masters should endeavour to keep each other fully informed during all stages of the operation particularly where safety and navigation are concerned. If an emergency situation arises the speed and ROT of the vessel should be broadcast to the tug Master at regular intervals.



Safety



Excellence



Collaboration




Sustainability

THE UK'S LEADING ENERGY PORT

mhpa.co.uk




Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	57	


**Nominated Tugs:**

- a. Only authorised active escorting Tug Masters are to be utilised.

**All refinery and LNG tugs are escort notated and specific tugs are dedicated to LNGC escorting. For QMAX LNGC's if the escorting tug has less than 100T bollard pull, then upper wind limits are reduced to 20kts gusting 25kts.**

**Tidal stream diagram**

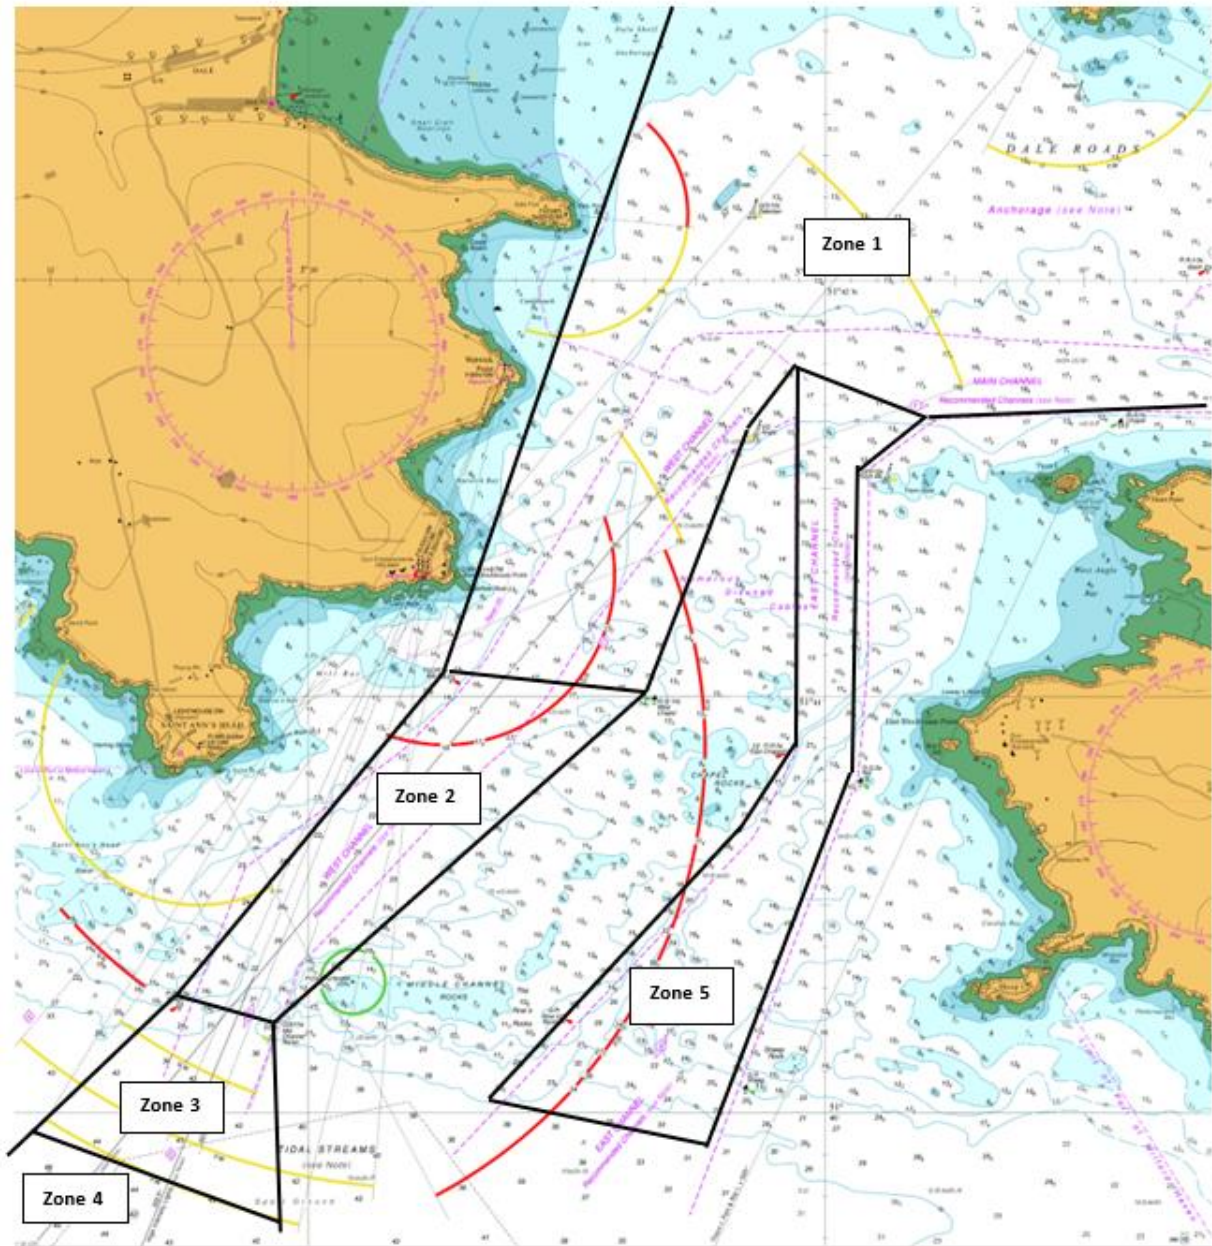

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	58	

## GUIDANCE FOR SHIPS MASTERS

The Port of Milford Haven has introduced escorting as a risk control measure designed to improve the safety of vessels navigating within the jurisdiction of the Authority.

Active escorting is seen as the most effective measure though passive escorting is also beneficial.

Active escorting will only take place if the sea state is acceptable to both the pilot and tug master.

From time to time vessels may be required to participate in escorting exercises. However, whenever possible, we will seek to both reach agreement with Masters and minimise delays.

## MASTER/PILOT EXCHANGE

- (1) In addition to the standard information to be passed between Pilot and Master, it is recommended that the Pilot is provided with a simple A4 arrangement of the poop deck area showing the layout and safe working load (SWL) of the mooring fittings and inform him of the appropriate point for towing.
- (2) The Pilot will provide additional information to the Master over the escorting process.

Escorting is compulsory for:


- a. All loaded tankers of 50,000 tonnes deadweight and above.
  - b. Certain loaded vessels between 25,000 and 50,000 tonnes deadweight carrying persistent oil cargo at the discretion of the Harbourmaster.
  - c. All LNGC.
- (3) Escort tug will make fast using 200t SWL lead and strong point. Where not available the Emergency Towing fairlead and strong point will be used, please ensure that any wires have been removed in advance from the lead and strong point.

**M RYAN**  
**Harbourmaster**



THE UK'S LEADING ENERGY PORT

mhpa.co.uk

Document Type	General Procedure			
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	59	



### SCHEDULE 2 CHECKLIST VERSION 04.2024

Movement Data	
Movement Type	
ETA / ETD	

Port Information	
Previous / Next port	
Agent (Owner if None)	

Vessel Details	
Vessel name	
IMO number	
Callsign	
MMSI number	

Current Condition / Total Cargo on-board	
Cargo Type	
Total cargo tonnes (LWT)	
Loaded or Ballast	
Full or Part Cargo	

Vessel Particulars	
DWT	
GRT	
Length overall (m)	
Beam (m)	

Current Freeboard/Draft (in Salt Water)	
Maximum Draft (m)	
Freeboard (m)	
Pilot Access Shell Doc	

Vessel Propulsion			
Propulsion Type			
Number of propellers			
CPP / FPP / Azipod			
Thrusters	Number	Power	kW/BHP
BOW (If NONE enter 0)			
Stern (If NONE enter 0)			

Manoeuvring	
Number of rudders	
Type of rudders	
Dead Slow Ahead Speed	

Vessel Equipment	
Type	All in good working order?
Navigation	
Communication	
Mechanical	
Safety	


Special Manoeuvring Equipment	

Defects / Conditions of Class	Yes/No
Does the vessel have any Defects / Conditions of Class? If YES, detail below. If NO, leave below blank.	

Information Checklist (see PoMH Information Notice for additional guidance)	Yes/No
<b>Certification:</b> All certification and documentation held are valid	
<b>Pilot/Combination Ladder:</b> Confirm all are properly constructed; recently inspected; in good condition and the complete arrangement will be rigged as per SOLAS and IMO requirements with the pilot ladder resting against the vessel hull over the complete length of the ladder.	
<b>Pilot Ladder Age:</b> Confirm that all pilot ladders are less than 30 months old or have been retested and recertified in the last 30 months.	
<b>Belting:</b> If fitted, confirm that there is a 6m longitudinal gap at the pilot ladder for pilot boat access as	
<b>Weighted heaving lines:</b> Confirm that no dangerously weighted heaving lines (including painted monkeys fists) will be used in the working of tugs, mooring operations, pilot equipment transfers or any other operation whilst in port. <b>IMPORTANT NOTE - Criminal prosecution may result if a</b>	
<b>Escort Tug (Tankers 20,000 DWT and above):</b> Confirm vessel has an available and useable non-obstructed and suitably rated (200T or more on all LNGCs) strong point bits and chock towards the centre lead aft usable by an Escort Harbour Tug at all times. If this is also the SOLAS ETA, confirm	
<b>Additional Notes:</b> Additional information provided by the Master.	

Masters Surname	
Masters Initial	
Date	

Pilot Required	
Pilot Exemption Certificate	
If no Pilot Exemption Certificate for Milford Haven, enter NC	

Document Type	General Procedure			 <b>Port of Milford Haven</b>
Document Number	MAR-OPS-GUI-005			
Document Name:	Entry & Departure Guidelines for Vessels			
Date Issued:	18/04/2023	Revision:	J	
Sensitivity:	Public	Page No:	60	

MSF 5029 Rev 10/14



# SAFETY BULLETIN No. 2

## DANGEROUSLY WEIGHTED SHIPS HEAVING LINES

There have been several instances where dangerously weighted heaving lines, including the use of monkey's fists with additional weights inserted into them, have been used resulting in serious injury. Further guidance is contained in Ch 26 section 26.3.5 in the 2015 edition of the Code of Safe Working Practices for Merchant Seafarers.



Vessels using dangerously weighted heaving lines in the UK may be subject to prosecution

To arrange a subscription to future Safety Bulletins go to <https://www.gov.uk/government/publications/maritime-30-coastguard-agency-mca-safety-bulletin>. For further information please contact Ship Safety Branch, Maritime & Coastguard Agency Tel: +44 (0) 2380 329 100  
 MSF 5029 Rev 10/14  
 Issued: 28 September 2015

# REQUIRED BOARDING ARRANGEMENTS FOR PILOT

In accordance with SOLAS Regulation V/23 & IMO Resolution A.1045(27)  
 INTERNATIONAL MARITIME PILOTS' ASSOCIATION  
 H.Q.S. "Wellington" Temple Stairs, Victoria Embankment, London WC2R 2PN Tel: +44 (0)20 7240 3973 Fax: +44 (0)20 7210 3518 Email: office@impahq.org  
 This document and all IMO Pilot-related documents are available for download at: <http://www.impahq.org>

### RIGGING FOR FREEBOARDS OF 9 METRES OR LESS

### COMBINATION ARRANGEMENT FOR SHIPS WITH A FREEBOARD OF MORE THAN 9 METRES WHEN NO SIDE DOOR AVAILABLE

### PILOT LADDER WINCH REEL